

Jack Wechat









Jack Sewing Machine Co.,LTD.



No. 15 South Airport Road, Jiaojiang District, Taizhou, Zhejiang, PRC TEL: 0086-576-88177782 88177767 FAX: 0086-576-88177787

E-mail: sales@chinajack.com www.chinajack.com





"Make the service smarter Guide the industry future"





ABOUT JACK

Jack Sewing Machine Co., Itd was founded in August 2003, sewing machine industry originated in July 1995. Jack is an international high-tech enterprise which focusing on industrial sewing machinery research and development, production and marketing. After years of management and development, the company has become a leading scale of industrial sewing machine manufacturer and one of the largest production and sales enterprises, especially have absolute pioneering advantage in the lockstitch, overlock and interlock sewing machines. On 19 January 2017, Jack has successfully listed on the main board of the Shanghai Stock Exchange (Name as "Jack stock", stock code: 603337).

Since the establishment, Jack has regarded technology research and development as the core driving force for development. As early as 2006, the introduction of advanced IPD (integrated product development) concept, after years of exploration and practice, has formed a set of industry-leading technology research and development system. At the same time, as the "national enterprise technology center", Jack has formed the industry's largest R & D team, strong talent reserve promoted the innovation and development of enterprises. At present JACK declares to be the largest number of invention patents company in world's sewing industry with over 800 patents in consecutive 4 years.

CHINA NO.1

JACK vigorously promotes the integration of the two innovation, and enhance the ability to respond to the market changes quickly. With the corporate mission: provide the best sewing machinery with optimum cost-performance ratio to all, and the corporate spirit: harmony, honesty, struggling, rise, JACK keeping pace with the times, developing and innovating to follow up a new round of global industrial revolution, to build the "WISDOM FACTORY" with wisdom data, intelligent manufacturing and intelligence services, therefore making unremitting efforts to create "the NO.1 Sewing Machine Brand all Over the World".

JACK have got great achievement such as

NO.1 of Sewing Machine Industry in China Light Industry Comprehensive Evaluation;

No.1 of Export Sales for Consecutive Eight Years;

No.1 Sales in Quantity in Sewing Machine Field all Around the Word.

JACK is worthy the title of "China No.1"



MAKE CUSTOMER HAPPY










































































































WONDERFUL JACK



STRONG R&D STRENGTH

7 R&d Centre 500Members R&d Team 800Patents, Leading the Industry



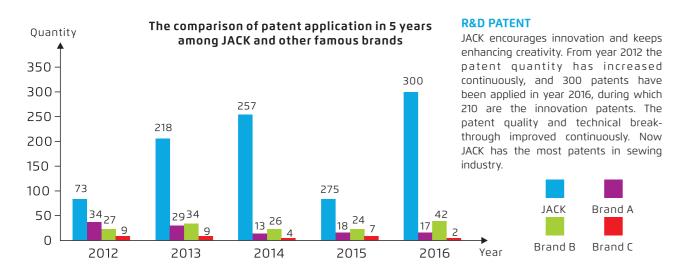

▼ JACK HONOR







Zhejiang Manufacturing Certificate



Asian Design Award



Top 100 China Light Industry



Competitive Enterprises of National Intellectual Property




9000



14000



18000

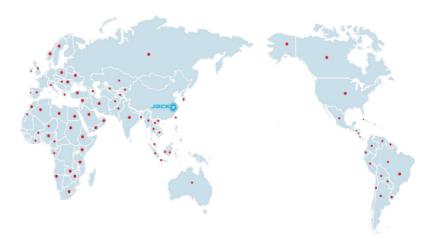

■ SALES NETWORK

JACK sales network located in more than 100 countries and has more than 5000 sales and service centre.















Supplier: ensure the quality and efficiency from the beginning.




Agent: ensure the service quality for end-user.



Apparel Industry: meet the commands and boost the industry upgrading.

SMART SERVICE

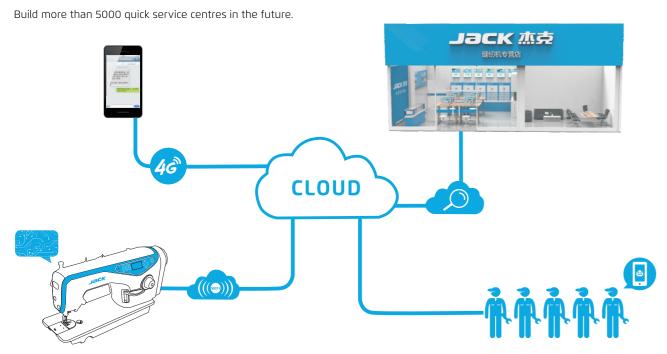

▼ ADVANCED EQUIPMENT: INTELLIGENT PRODUCING LINE

The first intelligent line finishing production by investing 100 million RMB, no need manpower, increase efficiency, improve the product accuracy and ensure the high-quality.







▼ JACK A-SHARE LISTED COMPANY



Successfully listed in Shanghai stock market

Jack China No.1

PRODUCT LIST

Lockstitch Machine Series

A6F Computerized Needle Feed Lockstitch Machine	- 03
A5 Thread Cleanness Computerized Lockstitch Machine	- 03
A4 Speaking Computerized Lockstitch Machine	- 04
A3 High Speed Computerized Lockstitch Machine	05
A2 Automatic Trimmer Lockstitch Machine	- 06
F4 Power Saving Lockstitch Machine	- 07
JK-58450J Computerized Double Needle Lockstitch Machine	- 08
JK-5559G Semi-dry Computerized Lockstitch Machine with Edge Cutter	- 09
JK-8558G Power Saving Chain Stitch Machine	10
verlock Machine Series	
C6 Super High Speed Automatic Overlock Machine with Pneumatic Suction Device	13
C5 High Speed Automatic Overlock Machine with Pneumatic Suction Device	14
C4 High Speed Automatic Overlock Machine	15
C3 High Speed Automatic Overlock Machine	16
E4 Super High Speed Power Saving Overlock Machine	17
JK-800D Power Saving Overlock Machine	18
JK-797DI/797TDI Small Cylinder-bed Variable Top Feed Power Saving Overlock Machine	19
JK-798TE/798TDI Variable Top Feed Computerized Overlock Machine	- 20
nterlock Machine Series	
K4-UT High Speed Computerized Cylinder-bed Interlock Machine	- 23

W4-UT High Speed Computerized Flat-bed Interlock Machine	24
JK-8670BDII-UT High Speed Computerized Small Cylinder-bed Interlock Machine	25
JK-8009VCDI Power Saving Multi-needle Machine	26
Special Machine Series	
M80 Series Programmable Electronic Large-area Pattern Sewing Machine	29
JK-T3020 Series Programmable Electronic Pattern Sewing Machine	30
JK-T5878-68B/78 Automatic Pocket Welting Machine	31
JK-T5878-58BQ Automatic Placket Setting Machine	32
JK-T1900G Electronic Bartacking Machine	33
JK-T1903GR Electronic Button Attaching Machine	34
JK-T1790E Electronic Lockstitch Buttonholing Machine	35
JK-T781E Integrated Electronic Lockstitch Buttonholing Machine	36
JK-T1377E Integrated Electronic Button Attaching Machine	37
JK-T9270D/9280D Direct Drive Feed-off-the Arm Machine	38
Heavy-duty Machine Series	
JK-2060G Compound Feeding Computerized Lockstitch Machine for Heavy-duty	41
JK-2030G Top & Bottom Feeding Computerized Lockstitch Machine for Heavy-duty	42
JK-2001G Long Stitch Length Lockstitch Machine for Heavy-duty	43
JK-6380E Top & Bottom Feeding Computerized Lockstitch Machine for Heavy-duty	44



Lockstitch Machine Series







A6F

Computerized Needle Feed Lockstitch Machine Full-automatic; Needle feed; No thread tail; Semi-dry

A5

Thread Cleanness Computerized Lockstitch Machine Full-automatic; No thread tail; Semi-dry

A6F









Needle feed; Avoid of layers offset No thread tail


Touchable panel

Large space

Model	Needle	Thread No.	Stitch Length (mm)	Presser Foot Lifting Height (mm)	Max. Speed (s.p.m)	Light/ Meduim Heavy Duty	Volume (mm)	Weight (kg)
A6F	DB×1 11-18#	2	4.5	5-13	4000	√	695×315×670	46/53
A6F-N	DB×1 11-18#	2	4.5	5-13	4000	√	695×315×670	46/53

Note: auto thread trimming, auto reverse, auto presser foot lifter, electronic thread tension are equipped as standard. N: less bird-nest device, pneumatic and electronic suction device are optional.

Α5









Initial sewing without bird nest; Short thread tail after trimming

Semi-dry

Sealed oil par

Model	Needle	Thread No.	Stitch Length (mm)	Presser Foot Lifting Height (mm)	Max. Speed (s.p.m)	Light/ Meduim Heavy Duty	Volume (mm)	Weight (kg)
A5	DB×1 11-18#	2	5	5-13	5000	√	645×248×550	40/46
A5-N	DB×1 11-18#	2	5	5-13	5000	√	645×248×550	40/46

Note: auto thread trimming, auto reverse, auto presser foot lifter, electronic thread tension are equipped as standard. N: less bird-nest device, pneumatic and electronic suction device are optional.




A4

Speaking Computerized Lockstitch Machine Full-automatic; Speaking









Speaking

Suitable for light and heavy material

Factory reset

Single shaft drive; Stable and fast

Model	Needle	Thread No.	Stitch Length (mm)	Presser Foot Lifting Height (mm)	Max. Speed (s.p.m)	Light/ Meduim Heavy Duty	Heavy Duty	Volume (mm)	Weight (kg)
A4-X	DB×1 11-18#	2	5	5-13	5000	√		645×248×550	40/46
A4	DB×1 11-18#	2	5	5-13	5000	√		645×248×550	40/46
A4-H	DP×5 18-21#	2	5	5-13	3500		√	645×248×550	40/46
A4-7	DB×1 11-18#	2	7	5-13	3500	√		645×248×550	40/46
A4-H-7	DP×5 18-21#	2	7	5-13	3500		√	645×248×550	40/46

Note: auto thread trimming, auto reverse, auto presser foot lifter, electronic thread tension are equipped as standard.

Lockstitch Machine Series | 03






A3

High Speed Computerized Lockstich Machine Auto-trimmer; Auto-reverse









Suitable for light and heavy material

nd Factory reset

Single shaft drive; Stable and fast Cooling fan

Model	Needle	Thread No.	Stitch Length (mm)	Presser Foot Lifting Height (mm)	Max. Speed (s.p.m)	Light/ Meduim Heavy Duty	Heavy Duty	Volume (mm)	Weight (kg)
АЗ	DB×1 11-18#	2	5	5-13	5000	√		645×248×550	40/46
АЗ-Н	DP×5 18-21#	2	5	5-13	3500		√	645×248×550	40/46
A3-7	DB×111-18#	2	7	5-13	3500	\checkmark		645×248×550	40/46
A3-H-7	DP×5 18-21#	2	7	5-13	3500		√	645×248×550	40/46
A3-C	DB×111-18#	2	5	5-13	5000	\checkmark		645×248×550	40/46
АЗ-СН	DP×5 18-21#	2	5	5-13	3500		√	645×248×550	40/46
A3-C-7	DB×111-18#	2	7	5-13	3500	√		645×248×550	40/46
A3-CH-7	DP×5 18-21#	2	7	5-13	3500		√	645×248×550	40/46

Note: auto thread trimming, auto reverse, and electronic thread tension are equipped as standard.



A2

Automatic Trimmer Lockstitch Machine Auto-trimmer









Auto tread trimming

LED light

Cooling fan

Needle position

Model	Needle	Thread No.	Stitch Length (mm)	Presser Foot Lifting Height (mm)	Max. Speed (s.p.m)	Light/ Meduim Heavy Duty	Heavy Duty	Volume (mm)	Weight (kg)
A2-CQ	DB×1 11-18#	2	5	5-13	4000	√		671×248×550	34/41
A2-CHQ	DP×5 18-21#	2	5	5-13	3500		√	671×248×550	34/41
A2-CQ-7	DB×1 11-18#	2	7	5-13	3500	\checkmark		671×248×550	34/41
A2-CHQ-7	DP×5 18-21#	2	7	5-13	3500		\checkmark	671×248×550	34/41


Note: auto thread trimming is equipped as standard.

Lockstitch Machine Series | 05






F4 Power Saving Lockstitch Machine Power saving









Power saving 71%

Convenient thread cutter

Needle position

LED light

Model	Needle	Thread No.	Stitch Length (mm)	Presser Foot Lifting Height (mm)	Max. Speed (s.p.m)	Light/ Meduim Heavy Duty	Heavy Duty	Volume (mm)	Weight (kg)
F4	DB×1 11-18#	2	5	5-13	5000	√		645×248×550	32/38.7
F4-H	DP×5 18-21#	2	5	5-13	3500		√	645×248×550	32/38.7
F4-7	DB×1 11-18#	2	7	5-13	3500	\checkmark		645×248×550	32/38.7
F4-H-7	DP×5 18-21#	2	7	5-13	3500		√	645×248×550	32/38.7
F4-HL-7	DP×5 18-21#	2	7	5-13	3500		√	645×248×550	32/38.7

Note: L: Large hook.



JK-58450J

Computerized Double Needle Lockstitch Machine Straight cutter; Auto cornering; Large space









For different thickness of thread Straight knife

Split needle bar

Built-in presser foot lifter

Model	Needle	Stitch Length (mm)	Needle Gauge (mm)	Presser Foot Lifting Height (mm)	Max. Speed (s.p.m)	Application	Function		Large Hook	Volume (mm)	Weight (kg)
JK-58420-003/JK-58420-005	DP×5 11-16#/14-22#	4/5	6.4	7-13	3000	Light/Heavy Duty	Straight Stitch			725×320×675	43/53.5
JK-58450-003/JK-58450-005	DP×5 11-16#/14-22#	5	6.4	7-13	3000	Light/Heavy Duty	Corner Stitch			725×320×675	43/53.5
JK-58720-003/JK-58720-005	DP×5 11-16#/14-22#	7	6.4	7-13	3000	Light/Heavy Duty	Straight Stitch		√	725×320×675	43/53.5
JK-58750-003/JK-58750-005	DP×5 11-16#/14-22#	7	6.4	7-13	3000	Light/Heavy Duty	Corner Stitch		√	725×320×675	43/53.5
JK-58420J-403E/JK-58420J-405E	DP×5 11-16#/14-22#	4/5	6.4	7-13	3000	Light/Heavy Duty	Straight Stitch			725×320×675	53/63
JK-58450J-403E/JK-58450J-405E	DP×5 11-16#/14-22#	5	6.4	7-13	3000	Light/Heavy Duty	Corner Stitch			725×320×675	53/63
JK-58450J-413E/JK-58450J-415E	DP×5 11-16#/14-22#	5	6.4	7-13	3000	Light/Heavy Duty	Corner Stitch	√		725×320×675	53/63
JK-58720J-403E/JK-58720J-405E	DP×5 11-16#/14-22#	7	6.4	7-13	3000	Light/Heavy Duty	Straight Stitch		√	725×320×675	53/63
JK-58750J-403E/JK-58750J-405E	DP×5 11-16#/14-22#	7	6.4	7-13	3000	Light/Heavy Duty	Corner Stitch		√	725×320×675	53/63
JK-58750J-413E/JK-58750J-415E	DP×5 11-16#/14-22#	7	6.4	7-13	3000	Light/Heavy Duty	Corner Stitch	√	√	725×320×675	53/63

Note: 1. E is computerized type: auto thread trimming, auto reverse, auto presser foot lifter, auto thread wipping are equipped as standard. Electronic thread tension is optional. Straight stitch: 103/105; Corner stitch: 103/105/113/115.

2. Optional needle gauge: 1/8 (3.2), 5/32 (4.0), 3/16 (4.8), 1.4 (6.4), 5/16 (7.9), 3/8 (9.5), 7/16 (11.1), 1/2 (12.7), 5/8 (15.9), 7/8 (22.2), 1 (25.4).


Lockstitch Machine Series | 07 Lockstitch Machine Series | 08





JK-5559G

Semi-dry Computerized Lockstitch Machine with Edge Cutter Semi-dry; Single shaft drive









Edge cutter and tape binder (JK-5558G-T)

Large space

Single shaft drive; Stable and fast

Model	Needle	Thread No.	Stitch Length (mm)	Needle Gauge (mm)	Presser Foot Lifting Height (mm)	Max. Speed (s.p.m)	Light/ Meduim Heavy Duty	Volume (mm)	Weight (kg)
JK-5559G-W	DB×1 11-18#	2	5	3.2	5-13	4000	√	645×248×550	40/46
JK-5558G-W	DB×1 11-18#	2	5	3.2	5-13	4000	\checkmark	645×248×550	32/38.7
JK-5558G	DB×1 11-18#	2	5	3.2	5-13	4000	\checkmark	645×248×550	32/38.7
JK-5558G-WT	DB×1 11-18#	2	5	3.2	5-13	4000	√	645×248×550	32/38.7
JK-5558G-T	DB×1 11-18#	2	5	3.2	5-13	4000	√	645×248×550	32/38.7

Note: 1. JK-5559G-W is computerized, semi-dry, auto presser foot lifter, electronic thread tension are equipped as standard. 2. JK-5558G is direct drive type;

- 3. W: dry head; T: with fabric edge cutter and tape binder.



JK-8558**G**

Power Saving Chain Stitch Machine Power saving









Semi-dry

Auto presser foot lifter

Rear puller

Two needle gauges (JK-8560G)

Model	Needle Array	Needle Gauge	Needle	Needle No.	Thread No.	Needle Distance (mm)	Presser Foot Height (mm)	Light Material	Meduim Heavy Duty	Heavy Duty	Max. Speed (s.p.m)	Volume (mm)	Weight (kg)
JK-8558G-WZ	Parallel Double Needle	1/4,3/16, 1/8,3/8	TV×7 14#	2	4	1.4-4	4.5 (knee Control 8-10)	√	√		4000	675×275×595	39/47
JK-8558G-1WZ	Single Needle	-	TV×7 14#	1	2	1.4-4	4.5 (knee Control 8-10)	√	√		4000	675×275×595	39/47
JK-8558G-2WZ	Vertical Double Needle	3/16	TV×7 14#	2	4	1.4-4	4.5 (knee Control 8-10)	√	√		4000	675×275×595	39/47
JK-8560G-WZ	Slant Three Needle	1/8	TV×7 14#	3	6	1.4-4	4.5 (knee Control 8-10)	√	√		4000	675×275×595	39/47
JK-8560G-WZ-PL	Slant Three Needle	1/8	TV×7 18#	3	6	1.4-4	4.5 (knee Control 8-10)		√		4000	675×275×595	39/47
JK-8560G-PHWZ	Trigonal Three Needle	1/8	TV×7 21#	3	6	1.4-4	4.5 (knee Control 8-10)		√	√	4000	675×275×595	39/47

Note: PL: rear puller; JK-8558G/8560G: auto presser foot lifter is optional the parameter of JK-8558WD/8560WD is the same with JK-8558G/8560G.

Lockstitch Machine Series | 09 Lockstitch Machine Series | 10







C6

Super High Speed Automatic Overlock Machine with Pneumatic Suction Device Full-automatic; Pneumatic device; Oil proof and durable









High efficiency

Clean sewing

Oil free

Touchable panel


Model	Functions	Needle	Needle No.	Thread No.	Needle Distance (mm)	Stitch Width (mm)	Stitch Length (mm)	Differential Ratio	Presser Foot Lifting Height (mm)	Max. Speed (s.p.m)	Volume (mm)	Weight (kg)
C6-02×250	Pocket Binding Seaming	DC×27 14#	2	4	5	5	3.8	0.7-2	3.5	7500	582×360×640	35/48
C6-3-02/233/KS	Plain Seaming	DC×27 11#	1	3	-	4	3.8	0.7-2	6	7500	582×360×640	35/48
C6-3-12/233/KS	Bottom Hemming	DC×27 11#	1	3	-	4	3.8	0.7-2	5.5	7500	582×360×640	35/48
C6-3-32R2/223/KS	Narrow Stitch Seaming	DC×27 9#	1	3	-	1.5	3.8	0.7-2	5.5	7500	582×360×640	35/48
C6-WF-3-02/213	Non-wowen Material	DC×27 14#	1	3	-	4	8.5	-	5	7000	582×360×640	35/48
C6-4-M03/333/KS	Plain Seaming	DC×27 11#	2	4	2	4	4.6	0.7-2	6	7500	582×360×640	35/48
C6-4-M03/333/H/M/KS	Heavy Duty	DC×27 11#	2	4	2	4	4.6	0.7-2	6.5	7500	582×360×640	35/48
C6-MJ-4-53/233	Towel Ending	DC×27 11#	2	4	2	4	3.8	0.7-2	5.5	7500	582×360×640	35/48
C6-5-53/233	Strip Attach Seaming	DC×27 14#	2	5	3	4	3.8	0.7-2	5.5	7500	582×360×640	35/48
C6-5-03/233/KH	5×5 Stitch	DC×27 14#	2	5	5	5	3.8	0.7-2	6	7500	582×360×640	35/48
C6-5-03/333/KH	3×4 Stitch	DC×27 14#	2	5	3	4	3.8	0.7-2	6	7500	582×360×640	35/48
C6-5-A04/435	Extra Heavy Duty	DC×27 19#	2	5	5	6	5	0.8-1.5	7	7500	582×360×640	35/48
C6-6-03/333/KH	Plain Seaming	DC×27 11#	3	6	3×2	4	3.8	0.7-2	6	7500	582×360×640	35/48

Note: KS: vertical suction device; KH: horizontal suction device, other devices are pneumatic type; H/M: suitable for heavy and light material; PP: rear puller (optional); W: dry head (optional).



C5

High Speed Automatic Overlock Machine with Pneumatic Suction Device Full-automatic; Pneumatic device; Oil proof









Super short thread tail

Clean sewing

Voice guide; One key to reset

Intellgent recognition of fabric thickness

Model	Functions	Needle	Needle No.	Thread No.	Needle Distance (mm)	Stitch Width (mm)	Stitch Length (mm)	Differential Ratio	Presser Foot Lifting Height (mm)	Max. Speed (s.p.m)	Volume (mm)	Weight (kg)
C5-02×250	Pocket Binding Seaming	DC×27 14#	2	4	5	5	3.8	0.7-2	3.5	7000	525×360×640	33/44
C5-3-02/233/KS	Plain Seaming	DC×27 11#	1	3	-	4	3.8	0.7-2	5	7000	525×360×640	33/44
C5-3-12/233/KS	Bottom Hemming	DC×27 11#	1	3	-	4	3.8	0.7-2	5	7000	525×360×640	33/44
C5-3-32R2/223/KS	Narrow Stitch Seaming	DC×27 9#	1	3	-	1.5	3.8	0.7-2	5	7000	525×360×640	33/44
C5-WF-3-02/213	Non-wowen Material	DC×27 14#	1	3	-	4	8.5	-	5	7000	525×360×640	33/44
C5-4-M03/333/KS	Plain Seaming	DC×27 11#	2	4	2	4	4.6	0.7-2	5.5	7000	525×360×640	33/44
C5-4-M03/333/H/M/KS	Heavy Duty	DC×27 11#	2	4	2	4	4.6	0.7-2	6	7000	525×360×640	33/44
C5-MJ-4-53/233	Towel Ending	DC×27 11#	2	4	2	4	3.8	0.7-2	5	7000	525×360×640	33/44
C5-5-53/233	Strip Attach Seaming	DC×27 14#	2	5	3	4	3.8	0.7-2	5	7000	525×360×640	33/44
C5-5-03/233/KH	5×5 Stitch	DC×27 14#	2	5	5	5	3.8	0.7-2	5	7000	525×360×640	33/44
C5-5-03/333/KH	3×4 Stitch	DC×27 14#	2	5	3	4	3.8	0.7-2	5	7000	525×360×640	33/44
C5-5-A04/435	Extra Heavy Duty	DC×27 19#	2	5	5	6	5	0.8-1.5	7	7000	525×360×640	33/44
C5-6-03/333/KH	Plain Seaming	DC×27 11#	3	6	3×2	4	3.8	0.7-2	5	7000	525×360×640	33/44


Note: KS: vertical suction device; KH: horizontal suction device, other devices are pneumatic type; H/M: suitable for heavy and light material.





C4

High Speed Automatic Overlock Machine Full-automatic; Electronic device; Oil-proof; Voice guide







Intelligent recognition of fabric thickness



Voice guide; One key to reset



Available to narrow and wide edge

	UIIC	.KHess										
Model	Functions	Needle	Needle No.	Thread No.	Needle Distance (mm)	Stitch Width (mm)	Stitch Length (mm)	Differential Ratio	Presser Foot Lifting Height (mm)	Max. Speed (s.p.m)	Volume (mm)	Weight (kg)
C4-02×250	Pocket Binding Seaming	DC×27 14#	2	4	5	5	3.8	0.7-2	3.5	7000	525×360×510	33/41
C4-3-02/233	Plain Seaming	DC×27 11#	1	3	-	4	3.8	0.7-2	5	7000	525×360×510	33/41
C4-3-12/233	Bottom Hemming	DC×27 11#	1	3	-	4	3.8	0.7-2	5	7000	525×360×510	33/41
C4-3-32R2/223	Narrow Stitch Seaming	DC×27 9#	1	3	-	1.5	3.8	0.7-2	5	7000	525×360×510	33/41
C4-WF-3-02/213	Non-wowen Fabric	DC×27 14#	1	3	-	4	8.5	-	5	7000	525×360×510	33/41
C4-4-M03/333	Plain Seaming	DC×27 11#	2	4	2	4	4.6	0.7-2	5.5	7000	525×360×510	33/41
C4-4-M03/333/H/M	Heavy Duty	DC×27 11#	2	4	2	4	4.6	0.7-2	6	7000	525×360×510	33/41
C4-4-M03/333/AD	Adjustable Side Stitch Width	DC×27 11#	2	4	2	4-8	4.6	0.7-2	5.5	7000	525×360×510	33/41
C4-MJ-4-53/233	Towel Ending	DC×27 11#	2	4	2	4	3.8	0.7-2	5	7000	525×360×510	33/41
C4-5-53/233	Strip Attach Seaming	DC×27 14#	2	5	3	4	3.8	0.7-2	5	7000	525×360×510	33/41
C4-5-03/233	5×5 Stitch	DC×27 14#	2	5	5	5	3.8	0.7-2	5	7000	525×360×510	33/41
C4-5-03/333	3×4 Stitch	DC×27 14#	2	5	3	4	3.8	0.7-2	5	7000	525×360×510	33/41
C4-5-A04/435	Extra Heavy Duty	DC×27 19#	2	5	5	6	5	0.8-1.5	7	7000	525×360×510	33/41
C4-6-03/333	Plain Seaming	DC×27 11#	3	6	3×2	4	3.8	0.7-2	5	7000	525×360×510	33/41

Note: H/M: suitable for heavy and medium material. SD device is available (start and end suction device); volume: 525×360×640 (mm), weight 33/44 (kg).



C3

High Speed Automatic Overlock Machine Auto-trimmer; Auto presser foot lifter; Oil-proof







Oil-proof needle bar



One key to reset



Single shaft drive; Stable and fast

Model	Functions	Needle	Needle No.	Thread No.	Needle Distance (mm)	Stitch Width (mm)	Stitch Length (mm)	Differential Ratio	Presser Foot Lifting Height (mm)	Max. Speed (s.p.m)	Volume (mm)	Weight (kg)
C3-3-02/233	Plain Seaming	DC×27 11#	1	3	-	4	3.8	0.7-2	5	5800	525×360×510	30/38
C3-4-M03/333	Plain Seaming	DC×27 11#	2	4	2	4	4.6	0.7-2	5.5	5800	525×360×510	30/38
C3-4-M03/333/H/M	Heavy Duty	DC×27 11#	2	4	2	4	4.6	0.7-2	6	5800	525×360×510	30/38
C3-5-03/233	5×5 Stitch	DC×27 14#	2	5	5	5	3.8	0.7-2	5	5800	525×360×510	30/38
C3-5-03/333	3×4 Stitch	DC×27 14#	2	5	3	4	3.8	0.7-2	5	5800	525×360×510	30/38
C3-5-A04/435	Extra Heavy Duty	DC×27 19#	2	5	5	6	5	0.8-1.5	7	5800	525×360×510	30/38

Note: H/M: suitable for heavy and medium material.





E4

Super High Speed Power Saving Overlock Machine Power saving; Oil-proof









Suitable for light and heavy material Oil-proof needle bar

Easy to operate


Single shaft drive; Stable and fast

Model	Functions	Needle	Needle No.	Thread No.	Needle Distance (mm)	Stitch Width (mm)	Stitch Length (mm)	Differential Ratio	Presser Foot Lifting Height (mm)	Max. Speed (s.p.m)	Volume (mm)	Weight (kg)
E4-2	Fabric Joint Sewing	DC×27 11#	1	2	-	6	3.8	0.7-2	3.5	5500	525×360×510	28/36
E4-02×250	Pocket Binding Seaming	DC×27 14#	2	4	5	5	3.8	0.7-2	3.5	5500	525×360×510	28/36
E4-3-02/233	Plain Seaming	DC×27 11#	1	3	-	4	3.8	0.7-2	5	5500	525×360×510	28/36
E4-3-82/233	Back Latching	DC×27 11#	1	3	-	4	3.8	0.7-2	5	5500	525×360×510	28/36
E4-3-12/233	Blindstitch Hemming	DC×27 11#	1	3	-	4	3.8	0.7-2	5	5500	525×360×510	28/36
E4-3-32R2/223	Baby Overlock Stitch	DC×27 9#	1	3	-	1.5	3.8	0.7-2	5	5500	525×360×510	28/36
E4-WF-3-02/213	Non-wowen Material	DC×27 14#	1	3	-	4	8.5	-	5	5500	525×360×510	28/36
E4-4-M03/333	Plain Seaming	DC×27 11#	2	4	2	4	4.6	0.7-2	5.5	5500	525×360×510	28/36
E4-4-83/323	Back Latching	DC×27 11#	2	4	2	4	4.2	0.7-2	5.5	5500	525×360×510	28/36
E4-4-M03/333/H/M	Heavy Duty	DC×27 11#	2	4	2	4	4.6	0.7-2	6	5500	525×360×510	28/36
E4-MJ-4-53/233	Towel Ending	DC×27 11#	2	4	2	4	3.8	0.7-2	5	5500	525×360×510	28/36
E4-5-53/233	Strip Attach Seaming	DC×27 14#	2	5	3	4	3.8	0.7-2	5	5500	525×360×510	28/36
E4-5-02A/233	Light Material	DC×27 11#	2	5	3	4	3.8	0.7-2	5	5500	525×360×510	28/36
E4-5-03/233	5×5 Stitch	DC×27 14#	2	5	5	5	3.8	0.7-2	5	5500	525×360×510	28/36
E4-5-03/333	3×4 Stitch	DC×27 14#	2	5	3	4	3.8	0.7-2	5	5500	525×360×510	28/36
E4-5-A04/435	Extra Heavy Duty	DC×27 19#	2	5	5	6	5	0.8-1.5	7	5500	525×360×510	28/36
E4-6-03/333	Plain Seaming	DC×27 11#	3	6	3×2	4	3.8	0.7-2	5	5500	525×360×510	28/36



JK-800D

Power Saving Overlock Machine No oil leakage











Power saving 71%

High speed and adjustable

No oil leakage

LED light

Model	Needle	Needle No.	Thread No.	Needle Distance (mm)	Needle Width (mm)	Stitch Length (mm)	Differential Ratio	Presser Foot Lifting Height (mm)	Max. Speed (s.p.m)	Volume (mm)	Weight (kg)
JK-803D-M1-15	9#	1	3	-	1.5	4	0.7-2	5.5	6000	500×360×500	28.5/36.5
JK-803D-M2-04	11#	1	3	-	4	4	0.7-2	5.5	6000	500×360×500	28.5/36.5
JK-803D-M5-04/BK	11#	1	3	-	4	4	0.7-2	5.5	6000	500×360×500	28.5/36.5
JK-804D-M2-24	11#	2	4	2	4	4.2	0.7-2	5.5	6000	500×360×500	28.5/36.5
JK-804D-M5-23/BK	11#	2	4	2	3	4.2	0.7-2	5.5	6000	500×360×500	28.5/36.5
JK-805D-M2-35	14#	2	5	3	5	4	0.7-2	5	5500	500×360×500	28.5/36.5
JK-805D-M2-55	14#	2	5	5	5	4	0.7-2	5	5500	500×360×500	28.5/36.5
JK-805D×2-56	19#	2	5	5	6	4.2	0.7-1.4	6	5500	500×360×500	28.5/36.5

The specification of JK-800 series is the same as JK-800D series.





JK-797TDI

Small Cylinder-bed Variable Top Feed Power Saving Overlock Machine Power saving; Small cylinder; Variable top feed







Differential feeding; Avoid of layers offset



Automatic extension device; Stable and high efficiency




One machine with multifunctions

Model	Needle	Needle No.	Thread No.	Needle Distance (mm)	Stitch width (mm)	Stitch Length (mm)	Differential Ratio	Presser Foot Lifting Height (mm)	Max. Speed (S.p.m)	Volume (mm)	Weight (kg)
JK-797TDI-3-504-02/233N	DC×27 11#	1	3	-	4	3.8	0.8-1.8	5	5500	465X360X485	27.1/34.5
JK-797TDI-3-504-02/233N/FR01	DC×27 11#	1	3	-	4	3.8	0.8-1.8	5	5500	465×360×485	27.1/34.5
JK-797TDI-3-504-02/233N/FR02	DC×27 11#	1	3	-	4	3.8	0.8-1.8	5	5500	465×360×485	27.1/34.5
JK-797TDI-3-504-02/233N/KS/FR01	DC×27 11#	1	3	-	4	3.8	0.8-1.8	5	5500	465×360×485	27.1/34.5
JK-797TDI-3-504-02/233N/KS/FR02	DC×27 11#	1	3	-	4	3.8	0.8-1.8	5	5500	465×360×485	27.1/34.5
JK-797TDI-4-514-M03/333	DC×27 9#	2	4	2	4	3.8	0.8-1.8	5.5	5500	465×360×485	27.1/34.5
JK-797TDI-4-514-M03/333/FR01	DC×27 9#	2	4	2	4	3.8	0.8-1.8	5.5	5500	465×360×485	27.1/34.5
JK-797TDI-4-514-M03/333/FR02	DC×27 9#	2	4	2	4	3.8	0.8-1.8	5.5	5500	465×360×485	27.1/34.5
JK-797TDI-4-514-M03/333/KS/FR01	DC×27 9#	2	4	2	4	3.8	0.8-1.8	5.5	5500	465×360×485	27.1/34.5
JK-797TDI-4-514-M03/333/KS/FR02	DC×27 9#	2	4	2	4	3.8	0.8-1.8	5.5	5500	465×360×485	27.1/34.5

Note: 1. The parameters of small cylinder bed JK-797DI series are the same with above parameters.

2. KS: pneumatic type (verticl), FR01: automatic extension device, FR02: mechanical extension device.







Differential feeding; Avoid of layers offset



Auto thread trimming



Easy to adjust differential ratio



100% safety device

Model	Functions	Needle	Needle No.	Thread No.	Needle Distance (mm)	Stitch Width (mm)	Stitch Length (mm)	Differential Ratio	Presser Foot Lifting Height (mm)	Max. Speed (s.p.m)	Volume (mm)	Weight (kg)
JK-798TE-4-514-M03/333	Plain Seaming	DC×27 11#	2	4	2	4	4.6	0.7-2	5.5	7000	505×360×565	29.2/39.8
JK-798TE-4-514-A04/435	Extra Heavy Duty	DC×27 14#	2	4	2	4	7	0.8-1.5	6	6500	505×360×565	29.2/39.8
JK-798TE-5-516-M03/333	5×5 Stitch	DC×27 14#	2	5	3	4	3.8	0.7-2	5	7000	505×360×565	29.2/39.8
JK-798TE-5-516-M03/233	3×4 Stitch	DC×27 14#	2	5	5	5	3.8	0.7-2	5	7000	505×360×565	29.2/39.8
JK-798TE-5-516-A04/435	Extra Heavy Duty	DC×27 19#	2	5	5	6	5	0.8-1.5	7	6500	505×360×565	29.2/39.8

Note: super high speed direct drive overlock with differential ratio: JK-798TDI series.



Interlock Machine Series







K4-UT

High Speed Computerized Cylinder-bed Interlock Machine Full-automatic; Multi-functional; Stable





Form light to heavy material





Auto thread trimming







Tape binding

Covering stitch

Bottom hemming

Sewing bed extension device

Model	Functions	Needle	Needle No.	Thread No.	Stitch Length (mm)	Stitch Width (mm)	Differential Ratio	Presser Foot Lifting Height (mm)	Max. Speed (s.p.m)	Volume (mm)	Weight (kg)
K4-UT-01GB	Plain Seaming	UY128GAS 11-14#	3	5	1.5-4.5	5.6/6.4	0.8-1.3	7	5500	670×445×595	52/62
K4-UT-02BB	Tape Binding	UY128GAS 11-14#	3	5	1.5-4.5	5.6/6.4	0.8-1.3	7	5500	670×445×595	52/62
K4-UT-03GB	Covering Stitch	UY128GAS 11-14#	3	5	1.5-4.5	5.6/6.4	0.8-1.3	7	5500	670×445×595	52/62
K4-UT-08AC	Bottom Hemming	UY128GAS 11-14#	3	5	1.5-4.5	5.6/6.4	0.8-1.3	7	5500	670×445×595	52/62
K4-UT-35AC	Bottom Hemming (left-side Cutter)	UY128GAS 11-14#	3	5	1.5-4.5	5.6/6.4	0.8-1.3	7	5000	670×445×720	53/65
K4-D-01GB	Plain Seaming	UY128GAS 11-14#	3	5	1.5-4.5	5.6/6.4	0.8-1.3	7	5500	670×445×595	46/56
K4-D-02BB	Tape Binding	UY128GAS 11-14#	3	5	1.5-4.5	5.6/6.4	0.8-1.3	7	5500	670×445×595	46/56
K4-D-03GB	Covering Stitch	UY128GAS 11-14#	3	5	1.5-4.5	5.6/6.4	0.8-1.3	7	5500	670×445×595	46/56
K4-D-08AC	Bottom Hemming	UY128GAS 11-14#	3	5	1.5-4.5	5.6/6.4	0.8-1.3	7	5500	670×445×595	46/56
K4-D-35AC	Bottom Hemming (left-side Cutter)	UY128GAS 11-14#	3	5	1.5-4.5	5.6/6.4	0.8-1.3	7	5000	670×445×720	47/59

Note: UT: computerized, D: direct drive.







W4-UT

High Speed Computerized Flat-bed Interlock Machine Full-automatic; Multifunctional; Stable









Auto thread trimming

From light to heavy material

Cylinder bed; Easy to feed

Four-in-one sewing bed









Tape binding

Covering stitch

Bottom hemming

Cylinder bed; Easy to feed

Model	Functions	Needle	Needle No.	Thread No.	Stitch Length (mm)	Stitch Width (mm)	Differential Ratio	Presser Foot Lifting Height (mm)	Max. Speed (s.p.m)	Volume (mm)	Weight (kg)
W4-UT-01GB	Plain Seaming	UY128GAS 11-14#	3	5	1.5-4.5	5.6/6.4	0.65-1.3	7	5500	670×445×595	54/64
W4-UT-02BB	Tape Binding	UY128GAS 11-14#	3	5	1.5-4.5	5.6/6.4	0.65-1.3	7	5500	670×445×595	54/64
W4-UT-03DB	Covering Stitch	UY128GAS 11-14#	3	5	1.5-4.5	5.6/6.4	0.65-1.3	7	5500	670×445×595	54/64
W4-UT-08AC	Bottom Hemming	UY128GAS 11-14#	3	5	1.5-4.5	5.6/6.4	0.65-1.3	7	5500	670×445×595	54/64
W4-D-01GB	Plain Seaming	UY128GAS 11-14#	3	5	1.5-4.5	5.6/6.4	0.65-1.3	7	5500	670×445×595	48/58
W4-D-02BB	Tape Binding	UY128GAS 11-14#	3	5	1.5-4.5	5.6/6.4	0.65-1.3	7	5500	670×445×595	48/58
W4-D-03DB	Covering Stitch	UY128GAS 11-14#	3	5	1.5-4.5	5.6/6.4	0.65-1.3	7	5500	670×445×595	48/58
W4-D-05CB	Elastic Lace Attaching (Right-Side Cutter)	UY128GAS 11-14#	3	5	1.5-4.5	5.6/6.4	0.65-1.3	5	4000	670×445×595	48/58
W4-D-07CB	Elastic Lace Attaching	UY128GAS 11-14#	3	5	1.5-4.5	5.6/6.4	0.65-1.3	5	5500	670×445×595	48/58
W4-D-08AC	Bottom Hemming	UY128GAS 11-14#	3	5	1.5-4.5	5.6/6.4	0.65-1.3	7	5500	670×445×595	48/58
W4-D-23GB	Plain Seaming (large Stitch Length)	UY128GAS 11-14#	3	5	6	5.6/6.4	1	7	4000	670×445×595	48/58
W4-D-23BB	Tape Binding (Large Stitch Length)	UY128GAS 11-14#	3	5	6	5.6/6.4	1	7	4000	670×445×595	48/58
W4-D-23GBL	Plain Seaming (Extra Large Stitch Length)	UY128GAS 11-14#	2	4	7-7.5	5.6/6.4	1	7	4000	670×445×595	48/58
W4-D-23BBL	Tape Binding (Extra Large Stitch Length)	UY128GAS 11-14#	2	4	7-7.5	5.6/6.4	1	7	4000	670×445×595	48/58

Note: UT: computerized, D: direct drive.

Interlock Machine Series | 23 Interlock Machine Series | 24





JK-8670BDII-UT

High Speed Computerized Small Cylinder-bed Interlock Machine Small cylinder; Full-automatic









Small cylinder

Auto thread trimming

Out-moved thread cam

Model	Functions	Needle	Needle No.	Thread No.	Stitch Length (mm)	Stitch Width (mm)	Differential Ratio	Presser Foot Lifting Height (mm)	Max. Speed (S.p.m)	Volume (mm)	Weight (kg)
JK-8670BD II-01CB/UT	Plain Seaming	UY128GAS 11-14#	3	5	1.5-3.6	5.6/6.4	0.8-1.4	6.2	4500	680×420×630	50/60
JK-8670BD II-03FB/UT	Covering Stitch	UY128GAS 11-14#	3	5	1.5-3.6	5.6/6.4	0.8-1.4	6.2	4500	680×420×630	50/60
JK-8670BD II-03GB/UT	Covering Stitch	UY128GAS 11-14#	3	5	1.5-3.6	5.6/6.4	0.8-1.4	6.2	4500	680×420×630	50/60
JK-8670BD II-08AC/UT	Bottom Hemming(Narrow)	UY128GAS 11-14#	3	5	1.5-3.6	5.6/6.4	0.8-1.4	6.2	4500	680×420×630	50/60
JK-8670BD II-08BC/UT	Bottom Hemming(Wide)	UY128GAS 11-14#	3	5	1.5-3.6	5.6/6.4	0.8-1.4	6.2	4500	680×420×630	50/60
JK-8670BD I-01CB	Plain Seaming	UY128GAS 11-14#	3	5	1.5-3.6	5.6/6.4	0.8-1.4	6.2	4500	630×390×630	42/54
JK-8670BD I-03FB	Covering Stitch	UY128GAS 11-14#	3	5	1.5-3.6	5.6/6.4	0.8-1.4	6.2	4500	630×390×630	42/54
JK-8670BD I-03GB	Covering Stitch	UY128GAS 11-14#	3	5	1.5-3.6	5.6/6.4	0.8-1.4	6.2	4500	630×390×630	42/54
JK-8670BD I-08AC	Bottom Hemming(Narrow)	UY128GAS 11-14#	3	5	1.5-3.6	5.6/6.4	0.8-1.4	6.2	4500	630×390×630	42/54
JK-8670BD I-08BC	Bottom Hemming(Wide)	UY128GAS 11-14#	3	5	1.5-3.6	5.6/6.4	0.8-1.4	6.2	4500	630×390×630	42/54

Note: UT: computerized, D: direct drive.



JK-8009VCDI

Power Saving Multi-needle Machine Power-saving; Wide applications









Elastic attaching

Tape attaching

Shirt-fronting

Model	Needle	Needle No.	Thread No.	Stitch Length (mm)	Stitch Width (mm)	Differential Ratio	Presser Foot Lifting Height (mm)	Max. Speed (S.p.m)	Volume (mm)
JK-8009HFD I-04064-254P	TV×5 19-21#	4	8	1.7-4.0	1/4"-1"-1/4"	8	3500	615×400×605	52.5/57.5
JK-8009VCD I-04064P	Uo113 14-16#	4	8	1.7-4.0	1/4"	8	3500	615×400×605	52.5/57.5
JK-8009VCD I-04080P	Uo113 14-16#	4	8	1.7-4.0	5/16"	8	3500	615×400×605	52.5/57.5
JK-8009VCD I-04085P	Uo113 14-16#	4	8	1.7-4.0	11/32"	8	3500	615×400×605	52.5/57.5
JK-8009VCD I-04095P	Uo113 14-16#	4	8	1.7-4.0	3/8"	8	3500	615×400×605	52.5/57.5
JK-8009VCD I-06048P	Uo113 14-16#	6	12	1.7-4.0	3/16"	8	3500	615×400×605	52.5/57.5
JK-8009VCD I-06064P	Uo113 14-16#	6	12	1.7-4.0	1/4"	8	3500	615×400×605	52.5/57.5
JK-8009VCD I-06080P	Uo113 14-16#	6	12	1.7-4.0	5/16"	8	3500	615×400×605	52.5/57.5
JK-8009VCD I-06095P	Uo113 14-16#	6	12	1.7-4.0	3/8"	8	3500	615×400×605	52.5/57.5
JK-8009VCD I-08032P	Uo113 14-16#	8	16	1.7-4.0	1/8"	8	3500	615×400×605	52.5/57.5
JK-8009VCD I-08048P	Uo113 14-16#	8	16	1.7-4.0	3/16"	8	3500	615×400×605	52.5/57.5
JK-8009VCD I-08064P	Uo113 14-16#	8	16	1.7-4.0	1/4"	8	3500	615×400×605	52.5/57.5
JK-8009VCD I-08085P	Uo113 14-16#	8	16	1.7-4.0	11/32"	8	3500	615×400×605	52.5/57.5
JK-8009VCD I-12032P	Uo113 14-16#	12	24	1.7-4.0	1/8"	8	3500	615×400×605	52.5/57.5
JK-8009VCD I-12048P	Uo113 14-16#	12	24	1.7-4.0	3/16"	8	3500	615×400×605	52.5/57.5
JK-8009VCD I-12064P	Uo113 14-16#	12	24	1.7-4.0	1/4"	8	3500	615×400×605	52.5/57.5
JK-8009VCD I-13064-32P	Uo113 14-16#	13	26	1.7-4.0	1/4" -1/8"	8	3500	615×400×605	52.5/57.5
JK-8009VCD I-17032P	Uo113 14-16#	17	34	1.7-4.0	1/8"	8	3500	615×400×605	52.5/57.5
JK-8009VCD I-23032P	Uo113 14-16#	23	46	1.7-4.0	1/8"	8	3500	615×400×605	52.5/57.5
JK-8009VCD I-25032P	Uo113 14-16#	25	50	1.7-4.0	1/8"	8	3500	615×400×605	52.5/57.5

Optional device: P (gear puller), PR (flat puller), VWL (front elastic feeding), VPL (tape attaching), VSF (shirt fronting), VPQ (elastic thread shirring).

Interlock Machine Series | 25 Interlock Machine Series | 26



Special Machine Series






M80 Series

Programmable Electronic Large-area Pattern Sewing Machine Intelligent; Standard; High efficiency







Wifi remote control



Intelligent central presser foot



Intelligent recongnition of patterns

Model	Application	Needle	Stitch No.	Thread No.	Sewing Rang (mm)	Mid-presser Foot Lifting Height (mm)	Needle Gauge (mm)	Max. Speed (s.p.m)	Volume (mm)	Weight (kg)
M80B	Plain Seaming	DP×5 7-16#	1	2	1200×760	17	1-5	2800	2300×1000×1400	406/502
M90	Plain Seaming	DP×5 7-16#	1	2	1400×850	17	1-5	3000	2300×1200×1400	646/742

Note: optional additional devices; A: automatic shuttle exchange; F11: laser cutting; F12:double screen display; F13: bottom line detection; F14: automatic template exchange; F15: revolving knife; F16:point pen device.



JK-T3020 Series

Programmable Electronic Pattern Sewing Machine Full-automatic; Programmbale



Wide range of application



Intelligent central presser foot



For heavy duty



Visual operation

Model	Optional Device	Needle	Stitch No.	Thread No.	Sewing Rang (mm)	Presser Foot Lifting Height (mm)	Max. Speed (s.p.m)	Volume (mm)	Weight (kg)
JK-T1310	F1	DP×17 11-25#	1	2	130×100	22	2700	1220×840×1320	140/190
JK-T2210	F1,F3,K	DP×17 11-25#	1	2	200×100	22	2700	1220×840×1320	136/186
JK-T3020	K,TDB	DP×17 11-25#	1	2	300×200	22	2700	1220×1220×1320	222/288
JK-T6040	-	DP×17 11-25#	1	2	600×400	22	2300	1920×1620×1440	343/479
JK-T10040	-	DP×17 11-25#	1	2	1000×400	22	2300	1920×1620×1440	352/488

Note: F1: flip presser foot, F3: sideslip presser foot , K: clamping device, TDB: pocket attaching.

Special Machine Series | 29





JK-T5878-68B/78

Automatic Pocket Welting Machine Full-automatic; Programmbale









High output

For different kinds of pocket

Automatic collective device

Easy to adjust; Precisely cutting

Model	Application	Needle	Stitch No.	Thread No.	Needle Gauge (mm)	Pocket Size (mm)	Max. Speed (s.p.m)	Volume (mm)	Weight (kg)
JK-T5878-68B	Straight Pocket	MTx190 14#-18#	2	3	8-20	18-220	3000	1600×1100×1500	240/350
JK-T5878-78	Slant Pocket	DPx17 14#-18#	2	3	8-20	18-220	3000	1600×1100×1500	240/350



JK-T5878-58BQ

Automatic Placket Setting Machine Full-automatic; Programmbale









High output

For different kinds of placket

Automatic collective

Laser positioning

Model	Application	Needle	Stitch No.	Thread No.	Sewing Width (mm)	Sewing Length (mm)	Max. Speed (s.p.m)	Volume (mm)	Weight (kg)
JK-T5878-58BQ	T-shirt Placket	DBx111#	1	2	1-50	15-260	4000	2060×1060×1570	200/300

Special Machine Series | 31





JK-T1900G

Electronic Bartacking Machine Full-automatic; Programmbale; Bartacking & buttonholing







Bartacking & buttonholing; Easy shift



Cap hole

Fishing nets







Model	Application	Needle	Stitch No.	Thread No.	X Direction Sewing Range (mm)	Y Direction Sewing Range (mm)	Presser Foot Lifting Height (mm)	Max. Speed (s.p.m)	Volume (mm)	Weight (kg)
JK-T1900GS	Light/Medium Material	DP×5 16#	1	2	40	30	13	3200	805×405×520	55/61
JK-T1900GH	Heavy Duty	DP×17 19#	1	2	40	30	13	3200	805×405×520	55/61
JK-T1900GM	Knitting Material	DP×5 11#	1	2	40	30	13	3200	805×405×520	55/61
JK-T1900GX	Pattern Sewing	DP×5 16#	1	2	40	30	13	2700	805×405×520	55/61
JK-T1900GY	Cap Hole	DP×5 16#	1	2	40	30	13	2700	805×405×520	55/61
JK-T1900GN	Fishing Nets	DP×17 19#	1	2	40	30	13	2700	805×405×520	55/61
JK-T1900GL	Bartacking for Socks	DP×17 14#	1	2	40	35	13	2700	805×405×520	55/61
JK-T1906GS	Pattern Sewing	DP×17 14#	1	2	60	50	10	2700	805×405×520	55/61
JK-T1906GP	Elastic Joint	DP×17 14#	1	2	60	50	10	2700	805×405×520	55/61

Note: auto presser foot lifter, auto thread trimming, auto thread wiping are equipped as standard.



JK-T1903GR

Electronic Button Attaching Machine Automatic button feeding











Automatic button feeding

Wide range of application

Easy to operate

One machine with multi-functions

Model	Application	Needle	Stitch	Thread	Button Diameter (mm)	Button Size (mm)	Presser Foot Lifting Height (mm)	Max. Speed (s.p.m)	Volume (mm)	Weight (kg)
JK-T1903G	Basic	DP×17 14#	1	2	Ф8-Ф30	X:2.4-6.8 Y:2.4-6.8	10	2700	805×405×520	55/61
JK-T1903GR	Automatic Button Sending	DP×17 14#	1	2	Ф9-Ф22	X:2.4-6.8 Y:2.4-6.8	13	2700	1070×870×1390	135/160

Note: auto presser foot lifter, auto thread trimming, auto thread wiping are equipped as standard.


Special Machine Series | 33 Special Machine Series | 34






JK-T1790E

Electronic Lockstitch Buttonholing Machine Full-automatic; Programmbale









Basting stitch before sewing

Continously sewing (JK-T1790B)

Cutter drived by servo motor

Model	Application	Button Hole Size (mm)	Needle	Needle No.	Side Cutter Function	Thread No.	Parallel Interspace (mm)	Presser Foot Lifting Height (mm)	Max. Speed (mm)	Volume (mm)	Weight (kg)
JK-T1790ES-1-D	Woven Material	25×4	DP×5 12#	1	1/4"~3/4"	2	0.2-2.5	17	4200	880×390×635	65/80
JK-T1790ES-2-D	Woven Material	35×5	DP×5 12#	1	1/4"~1"	2	0.2-2.5	17	4200	880×390×635	65/80
JK-T1790ES-3-D	Woven Material	41×5	DP×5 12#	1	1/4"~1 1/4"	2	0.2-2.5	17	4200	880×390×635	65/80
JK-T1791ES-D	Woven Material	70×5	DP×5 12#	1	1/4"~1 1/4"	2	0.2-2.5	17	4200	880×390×635	65/80
JK-T1792ES-D	Woven Material	120×5	DP×5 12#	1	1/4"~1 1/4"	2	0.2-2.5	17	4200	880×390×635	65/80
JK-T1790EK-1-D	Knitting Material	25×4	DP×5KN 11#	1	1/4"~3/4"	2	0.2-2.5	17	4200	880×390×635	65/80
JK-T1790EK-2-D	Knitting Material	35×5	DP×5KN 11#	1	1/4"~1"	2	0.2-2.5	17	4200	880×390×635	65/80
JK-T1790EK-3-D	Knitting Material	41×5	DP×5KN 11#	1	1/4"~1 1/4"	2	0.2-2.5	17	4200	880×390×635	65/80
JK-T1791EK-D	Knitting Material	70×5	DP×5KN 11#	1	1/4"~1 1/4"	2	0.2-2.5	17	4200	880×390×635	65/80
JK-T1792EK-D	Knitting Material	120×5	DP×5KN 11#	1	1/4"~1 1/4"	2	0.2-2.5	17	4200	880×390×635	65/80

Note: auto presser foot lifter, auto thread trimming are equipped as standard; continuously sewing is special function of JK-1790B serial machines.





Integrated Electronic Lockstitch Buttonholing Machine Auto presser foot lifter; Automatic











Auto thread trimming; Auto presser foot lifter

Power saving 70%

Easy to operate

Cooling fan

Model	Application	Button Hole Size (mm)	Needle	Needle No.	Side Cutter Function	Needle No.	Column Width (mm)	Automatic Thread Trimming	Automatic Presser Foot Lifter	Presser Foot Lifting Height (mm)	Max. Speed (mm)	Volume (mm)	Weight (kg)
JK-T781D-Q	Woven Material	22×4	DP×5 12#	1	1/4"~3/4"	2	0.2-2.5			12	3600	695×340×725	41/61
JK-T782D-Q	Woven Material	33×5	DP×5 12#	1	1/4"~1"	2	0.2-2.5			12	3600	695×340×725	41/61
JK-T783D-Q	Woven Material	40×5	DP×5 12#	1	1/4"~1 1/4"	2	0.2-2.5			12	3600	695×340×725	41/61
JK-T781DK-Q	Knitting Material	22×4	DP×5 12#	1	1/4"~3/4"	2	0.2-2.5			12	3600	695×340×725	41/61
JK-T781E-Q	Woven Material	22×4	DP×5 12#	1	1/4"~3/4"	2	0.2-2.5	\checkmark	\checkmark	12	3600	685×365×685	46/66
JK-T782E-Q	Woven Material	33×5	DP×5 12#	1	1/4"~1"	2	0.2-2.5	√	\checkmark	12	3600	685×365×685	46/66
JK-T783E-Q	Woven Material	40×5	DP×5 12#	1	1/4"~1 1/4"	2	0.2-2.5	\checkmark	√	12	3600	685×365×685	46/66
JK-T781EK-Q	Knitting Material	22×4	DP×5 12#	1	1/4"~3/4"	2	0.2-2.5	\checkmark	\checkmark	12	3600	685×365×685	46/66

Special Machine Series | 35 Special Machine Series | 36






JK-T1377E

Integrated Electronic Button Attaching Machine Automatic; Easy shift










Three patterns

Easy shift Patterns

Auto presser foot lifter

WP auto thread wiping device (optional)

Model	Needle	Stitch No.	Thread No.	Button Diameter (mm)	Button Hole Size (mm)	Automatic Thread Trimming	Automatic Presser Foot Lifter	Direct Drive, Integrated	Presser Foot Lifting Height (mm)	Max. Speed (s.p.m)	Volume (mm)	Weight (kg)
JK-T1377	TQ×7 16# TQ×1 16#	1	1	10-28	X(2.5~6.5) Y(0,2.5~4.5)	√	\checkmark		9	1500	570×435×420	23/28
JK-T1377E	TQ×7 16#	1	1	10-28	X (2.5~6.5) Y (0 2.5~4.5)	√	√	√	9	1500	620×460×430	28.5/34.5

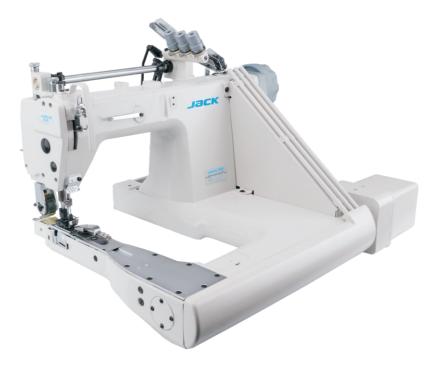

JK-T9270D/9280D

Direct Drive Feed-off-the Arm Machine Power saving









eans

Shirt

Raincoat

Optional pullers

Model	Needle Gauge	Needle	Stitch No.		Needle Distance (mm)	Presser Foot Lifting Height (mm)	Light Material	Medium Material	Heavy Duty	Heavier Duty	Max. Speed (mm)	Volume (mm)	Weight (kg)
JK-T9270D-12-Q	1/4,3/16	TV×64 12#	2	4	3.5	8	\checkmark				3500	685×535×475	56/60
JK-T9270D-12-2PL-Q	1/4,3/16	TV×64 12#	2	4	3.5	8	\checkmark				3500	685×535×475	56/60
JK-T9270D-12-2PS-Q	1/4,3/16	TV×64 12#	2	4	3.5	8	\checkmark				3500	685×535×475	56/60
JK-T9270D-12-2PL-Q	3/16	TV×64 12#	2	4	4.2	8	\checkmark				3500	685×535×475	56/60
JK-T9270D-13-Q	1/8	TV×64 12#	3	6	3.5	8	\checkmark				3500	685×535×475	56/60
JK-T9270D-13-2PL-Q	1/8	TV×64 12#	3	6	3.5	8	\checkmark				3500	685×535×475	56/60
JK-T9270D-22-Q	1/4,3/16	TV×64 14#	2	4	3.5	8		\checkmark			3500	685×535×475	56/60
JK-T9280D-53-Q	1/8	TV×5 21#	3	6	4.2	10			\checkmark		3500	685×535×475	56/60
JK-T9280D-73-2PL-Q	1/8	TV×5 21#	3	6	4.2	10				\checkmark	3500	685×535×475	56/60
JK-T9280D-73-PL-Q	1/8	TV×5 21#	3	6	4.2	10				\checkmark	3500	685×535×475	56/60
JK-T9280D-73-PS-Q	1/8	TV×5 21#	3	6	4.2	10				\checkmark	3500	685×535×475	56/60

Note: PL: rear puller; PS: box puller; JK-T9270D-12-2PL-Q needle gauge is 4.2mm for sewing raincoats.

Special Machine Series | 37



Heavy-duty Machine Series





JK-2060G

Compound Feeding Computerized Lockstitch Machine for Heavy-duty Full-automatic; Compound feeding; Large space









Compound feeding

For 8 layers of leather

Large space

Auto presser foot lifter (optional)

Model	Application	Needle				Two Presser Foot Working Distance (mm)	Foot Lifting	Speed		Reverse	Thread			Volume (mm)	Weight (kg)
JK-2060GHC-3Q	Sofa, Car Seat, Luggage, Shoes	Dp×17 20-23#	1	2	1-9	2.5-5.5	8/16	2200	√	√	√	√		785×320×605	43/53
JK-2060GHC-4Q	Sofa, Car Seat, Luggage, Shoes	Dp×17 20-23#	1	2	1-9	2.5-5.5	8/16	2200	√	\checkmark	√	√	√	785×320×605	43/53



JK-2030G

Top & Bottom Feeding Computerized Lockstitch Machine for Heavy-duty Full-automatic; Top and bottom feeding; Large space









Top and bottom feeding

For 8 layers of leather

Large space

Auto presser foot lifter (optional)

Model	Application	Needle				Two Presser Foot Working Distance (mm)	Foot Lifting	Speed		Reverse	Thread	Integrated		Volume (mm)	Weight (kg)
JK-2030GHC-3Q	Sofa, Car Seat, Luggage, Shoes	DP×17 20-23#	1	2	1-9	2.5-5.5	8/16	2200	√	√	\checkmark	√		785×320×605	43/53
JK-2030GHC-4Q	Sofa, Car Seat, Luggage, Shoes	DP×17 20-23#	1	2	1-9	2.5-5.5	8/16	2200	\checkmark	√	\checkmark	\checkmark	\checkmark	785×320×605	43/53

Heavy-duty Machine Series | 41





JK-2001G

Long Stitch Length Lockstitch Machine for Heavy-duty Auto-trimmer; Stitch length 12mm









For heavy duty Big stitch length

Large hook

One key to reset

Model	Application	Needle			Gauge	Two Presser Foot Working Distance (mm)	Foot Lifting Height	Speed	Thread	Reverse	Thread		Volume (mm)	Weight (kg)
JK-2001GHC-3Q ^T	ent, Curtains, Bedding, Disposable Slippers	P×17 20-23 #	1	2	1-12	-	8/16	3000	√	√	√	√	680×255×550	38/42



JK-6380E

Top & Bottom Feeding Computerized Lockstitch Machine for Heavy-duty Top and bottom feeding; Full-automatic









For heavy duty

Sealed lifter shaft of presser foot

Auto presser foot lifter

Direct drive; Power saving


Model	Application	Needle	Stitch No.			Two Presser Foot Working Distance (mm)	Presser Foot Lifting Height (mm)	Speed				Direct Drive, Integrated	Auto Presser Foot Lifter	Volume (mm)	Weight (kg)
JK-6380EHC-3Q	Sofa, Car Seat, Luggage, Shoes	DP×17 20 -23#	1	2	1-8	3.5-5.5	8/16	2000	\checkmark	\checkmark	\checkmark	\checkmark		680×255×550	38/42
JK-6380EHC-4Q	Sofa, Car Seat, Luggage, Shoes	DP×17 20-23#	1	2	1-8	3.5-5.5	8/16	2000	√	\checkmark	\checkmark	\checkmark	\checkmark	680×325×550	41/45
JK-6380EHC-3TQ _L	Gloves, Handbag Etc. Leather, Nonwoven Fabrics	DP×17 14#	1	2	1-8	3.5-5.5	8/16	1800	√	√	\checkmark	√		680×255×550	38/42
JK-6380BC-Q	Sofa, Car Seat, Luggage, Shoes	DP×17 20-23#	1	2	1-8	3.5-5.5	8/16	2000				\checkmark		605×255×550	31/38
JK-6380BC-Q-12	Sofa, Car Seat, Luggage, Tent, Curtain	DP×17 20-23#	1	2	1-12	3.5-5.5	8/16	2000				\checkmark		605×255×550	31/38
JK-6380C	Sofa, Car Seat, Luggage, Shoes	DP×17 20-23#	1	2	1-8	3.5-5.5	8/16	2000						605×255×550	31/38
JK-6380C-12	Sofa, Car Seat, Luggage, Tent, Curtain	DP×17 20-23#	1	2	1-12	3.5-5.5	8/16	2000						605×255×550	31/38

Heavy-duty Machine Series | 43




CONFIGURATION


Shirt

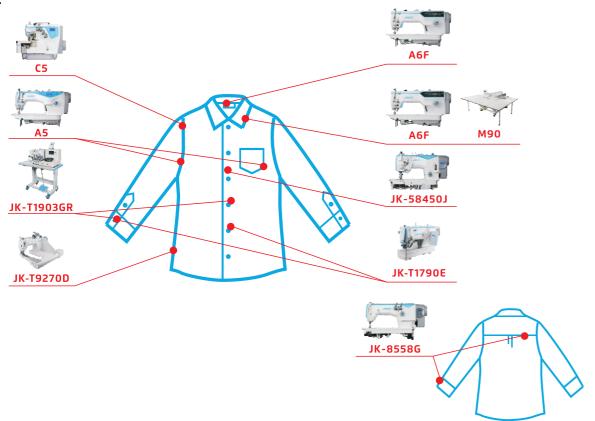


Trousers

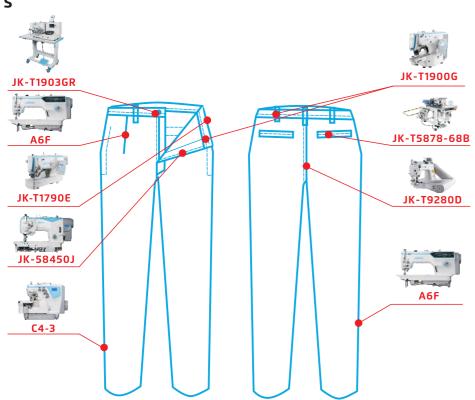

Jeans

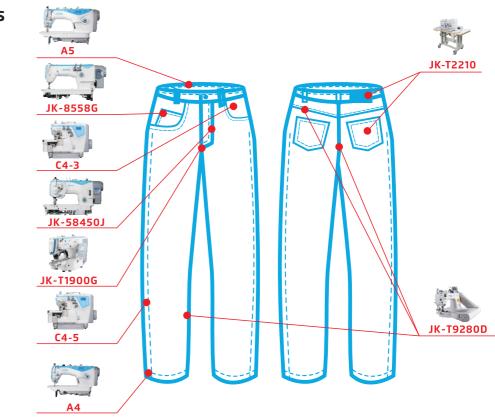


Bra

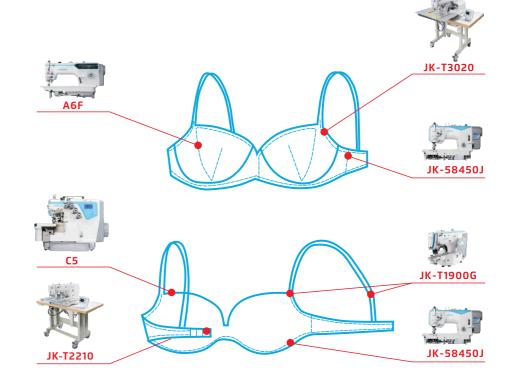





Briefs

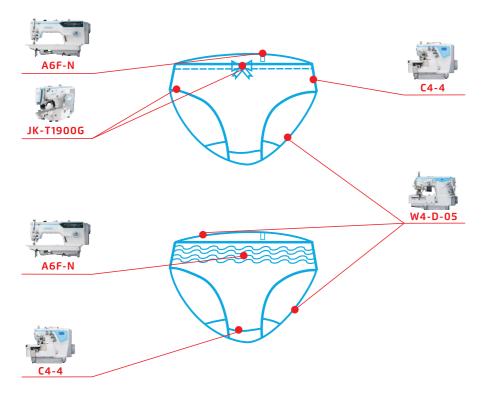


Polo-shirt

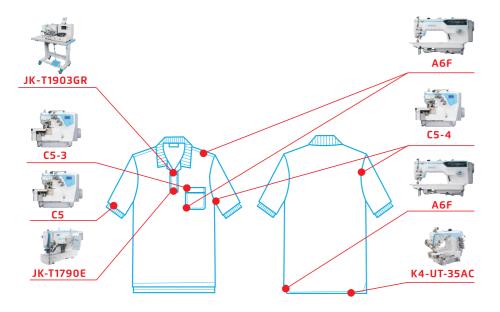

Dresses

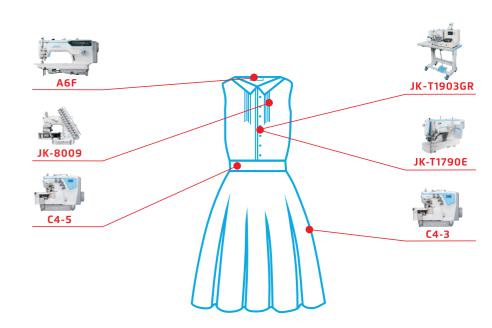

Bag

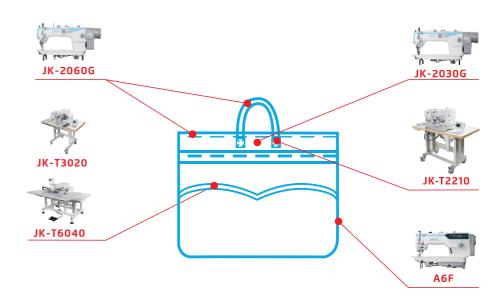



STITCH TABLE

Lockstitch




Lockstitch with short thread tail




Edge cut and tape binder P09



Cutting after sewing P09




Double needle straight stitch



Double needle corner stitch P08



Single needle chain stitch P10



Double needle chain stitch P10



Triple needle chain stitch P10




Heavy duty P39-42


Overlock



Pocket double chain rolling stitch P15




Fabric joint sewing P17



Three threads stitch P15




Three threads back latching stitch P17




Three threads baby overlock stitch P15



Three threads blindstitch hemming P15




Four threads stitch P15



Four threads back latching stitch P17



Four threads shirring stitch P18




Four thread tape attach stitch P15



Five threads stitch P15



Five threads heavy duty stitch P15



Five threads pocket double chain rolling stitch P15




Six threads sewing P15




Four threads variable top feed P18




Four Thread Interlock



Plain seaming P21/P22/P23




Tape binding P21/P22




Covering stitch (one side) P21/P22



Covering stitch P21/P22



Elastic lace attaching P22



Bottom hemming P21/P22/P23




Bottom hemming (left cutter)



Cylinder cover stitch P23



Elastic attaching P24



T-shirt folding seaming P24




Tape attaching P24




Waist band P24

Button Holing/Button Attaching



Button holing stitch P33



Button attaching stitch P32/P35

Bartacking Machine Stitch




Bartacking stitch P31




Cap hole stitch P31



Small pattern P31



Fishing net P31



Elastic joint P31




Cross bartacking stitch



Suits bartacking stitch P31



Jeans bartacking stitch P31



Bartacking for socks P31



Pattern Stitch

Apparel









Non-apparel









Home textile









Others









Chain Stitch








Double needle feed-off-the arm machine P36

Placket Samples








Invisible placket P30



Pocket Stitch



Single welt pocket P29



Double welt pocket P29



Double welt pocket with flap P29