

# **JACK**

China No.1

## **Computerized Cylinder-bed Interlock Machine**



Jack Wechat



Jack Sewing  
Machine Co.,Ltd.

---

**Jack Sewing Machines UK**

Web: [www.jacksewingmachines.co.uk](http://www.jacksewingmachines.co.uk)  
Email: [info@jacksewingmachines.co.uk](mailto:info@jacksewingmachines.co.uk)




JK-8669BDII-UT

JK-8669BDII-UT Advantages



1 For thin and heavy fabrics, One machine with multi functions

Enlarge the sewing range, suitable for various of fabrics like jeans and yarn

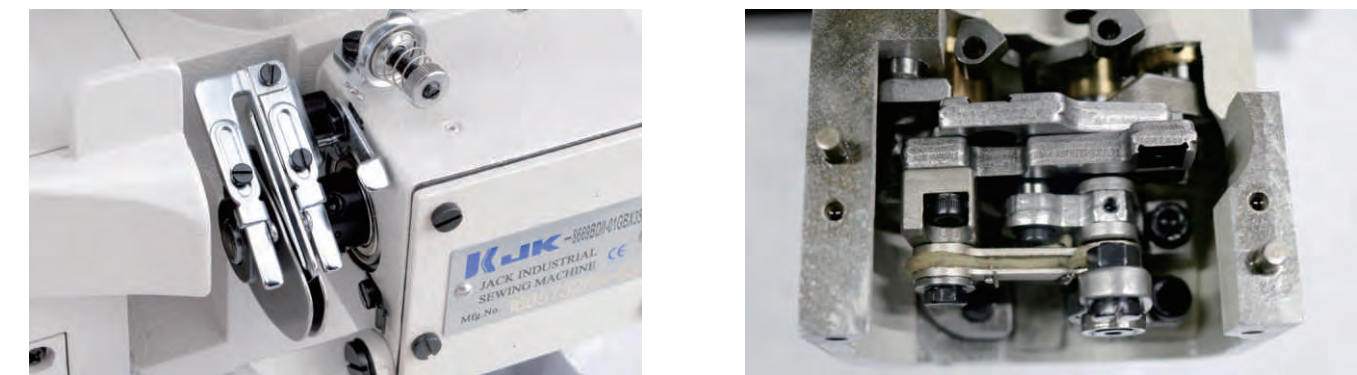


2 Out-moved Thread Cam, Easy Operation

Out-moved thread cam makes threading and cleaning thread easily


3 New design of feed dog holder, avoid needle breaking and stitch jump

New design of feed dog holder makes functions more stable and stitch more beautiful.  
Avoiding needle breaking and stitch jump

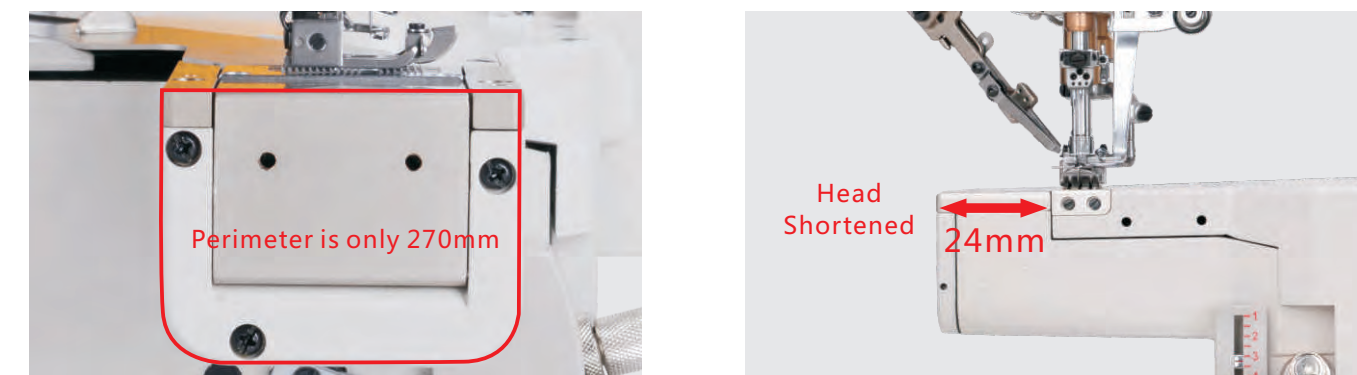


4 Small cylinder bed, easy to feed

Perimeter only 270mm; Shorter bed design; Easy to feed and with high efficiency

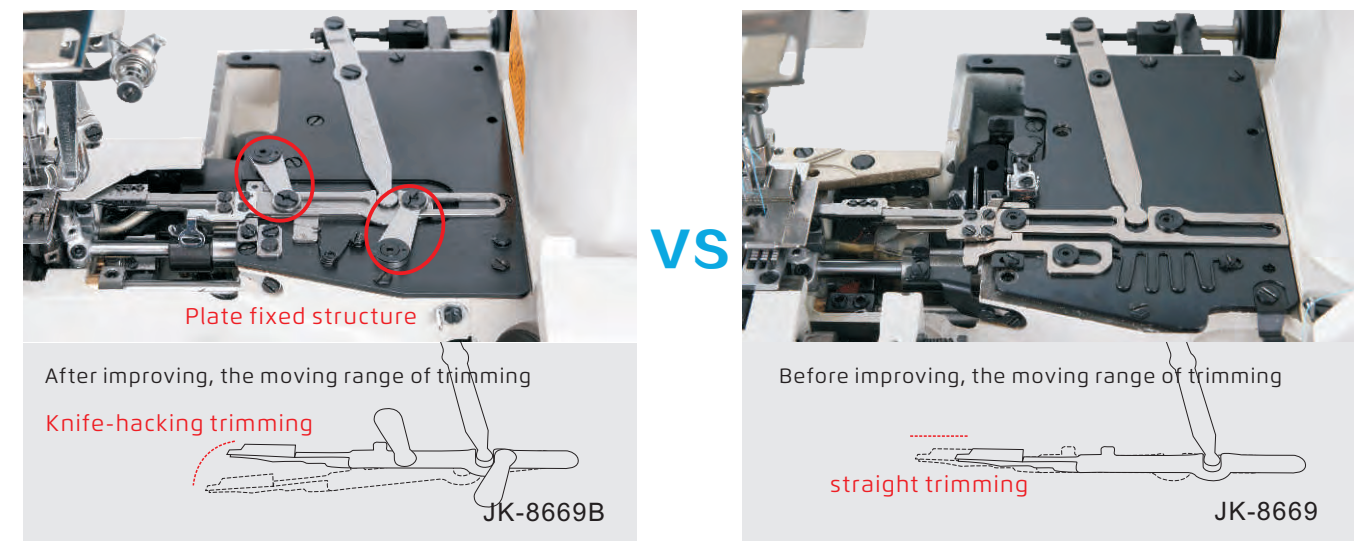

5 Reset cutter structure, trimming thread is more precise



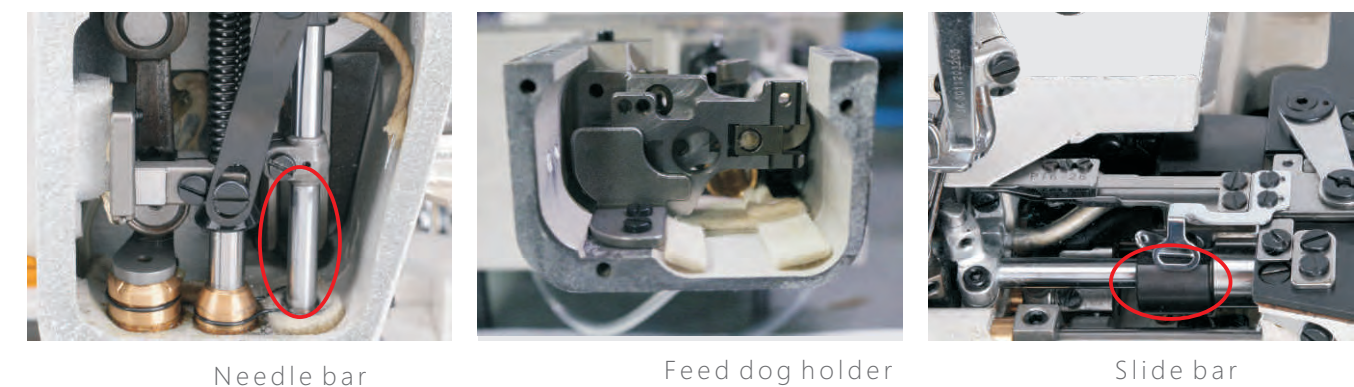














Before improving, trimming structure is easy to loose; Sometimes straight trimming cannot trim successfully  
After improving, with the fixing of trimming structure, the function is more stable; Knife-hacking trimming, 100% trimming precisely



6 Triple mechanisms make oil return forcibly. The product is clean

Needle bar does not leak oil; Feed dog holder does not dump oil; Slide bar does not eject oil

Technical parameter

				 (mm)	 (mm)		 (mm)	 (S.p.m)	UT		 (mm)	NW/GW (kg)
JK-8669B-01GB	11#/14#	3	5	1.5-4.5	5.6/6.4	0.8-1.3	6.2	5500			600×390×630	50/61
JK-8669BDI-01GB	11#/14#	3	5	1.5-4.5	5.6/6.4	0.8-1.3	6.2	5500			630×390×630	50/61
JK-8669BDII-01GB/UT	11#/14#	3	5	1.5-4.5	5.6/6.4	0.8-1.3	6.2	5500			680×420×630	54/64
JK-8669BDII-35AC/UT	11#/14#	3	5	1.5-4.5	5.6/6.4	0.8-1.3	6.2	5500			680×420×750	54/66