



CATALOG NO.103UG-GR

STYLES 39500UG 39500UM

THREADING DIAGRAM AND ILLUSTRATED PARTS LIST

FIRST EDITION




FIRST EDITION
© 2006

PRINTED 2006 IN USA


INFORMATION SUBJECT TO CHANGE WITHOUT NOTICE

© UNION SPECIAL CORPORATION ALL RIGHTS RESERVED IN ALL COUNTRIES.

39500 UG-1/8 THREADING DIAGRAM

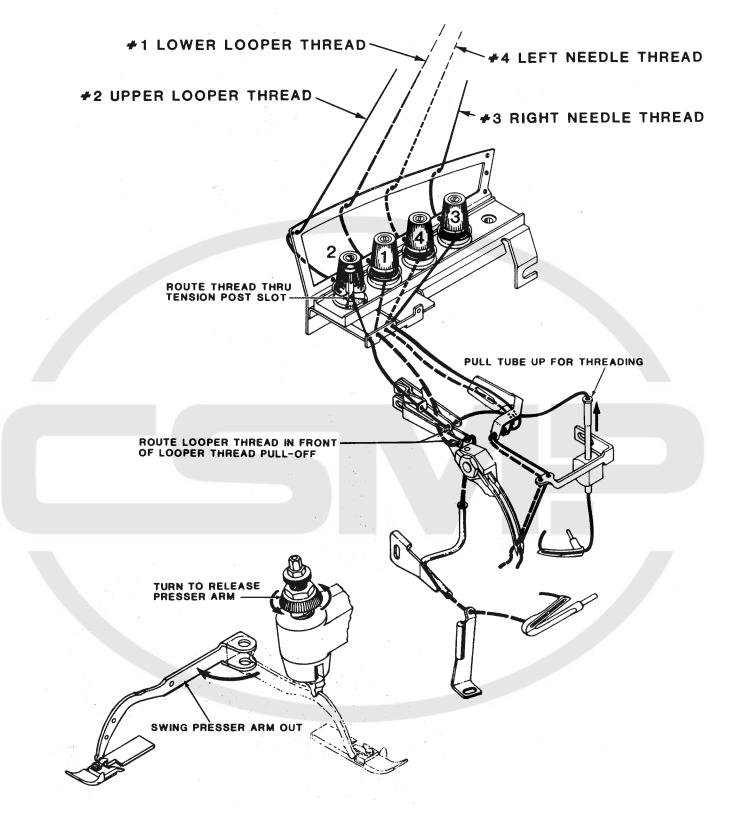


Thread machine in sequence as shown: (1) lower looper thread, (2) upper looper thread, (3) right needle thread and (4) left needle thread.

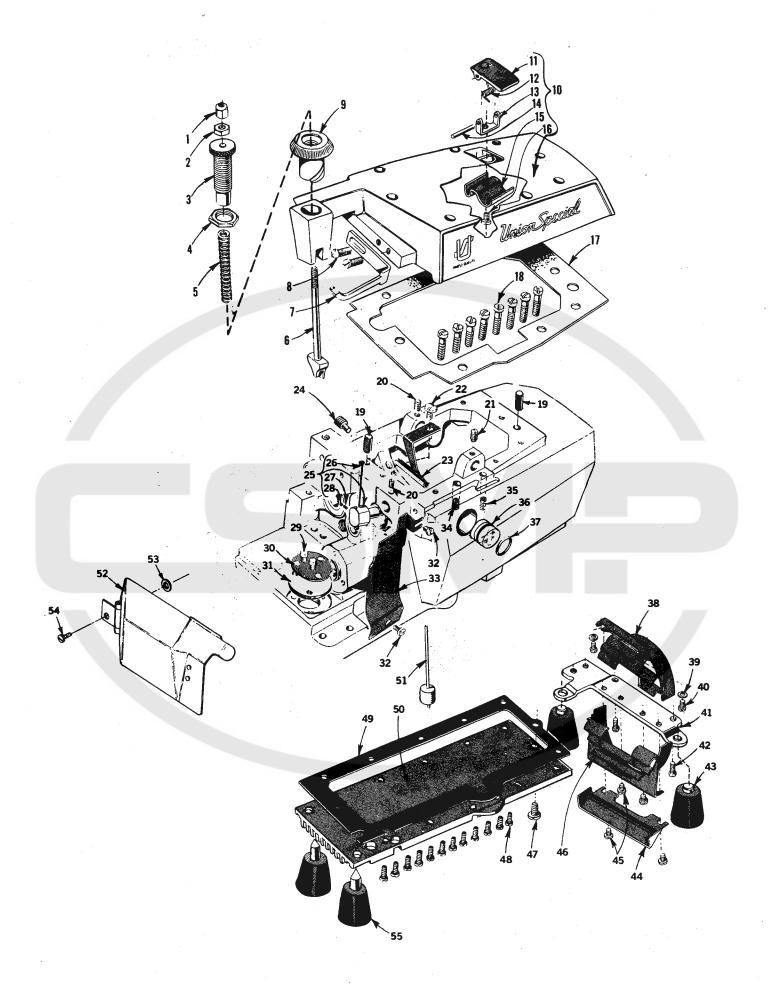


MAIN FRAME, PRESSER FOOT RELEASE PARTS, MISCELLANEOUS COVERS AND PLATES

Re No	f. o.	Part No.			<u>Description</u>	Amt. Req.
1		39557			Presser Spring Plunger Cap Nut	- 1
2		39557			Presser Spring Plunger Locking Nut	- 1
3 4		39557			Presser Spring Plunger Adjusting ScrewLock Nut, for adjusting screw	- 1
5		39557 39557	· Г		Presser Spring	- 1
6		39557	Α		Presser Spring Plunger	
7		39563			Top Cover Needle Thread Eyelet	- 1 - 1
8		22569	_		Screw, for top cover needle thread eyelet	- 2
9		39556			Presser Foot Release Bushing	- 1
10 11		39582 39582			Top Cover	- 1
12		39582			Oil Filler Cover	
13		39582			Hinge Bracket	
14			103	Blk.	Hinge Pin	- 1
15		39582			0il Guard	- 1
16		22562	• •		Screw, for hinge bracket	- 1
17 18		39582 22541	ΒZ		Top Cover GasketScrew, for top cover	- 1
19		667	D-8		Dowel Pin	- 8
20		22565	- 0		Set Screw, for upper looper thread tube assembly and for	• 2
					upper looper drive lever shaft	- 2
21		22565			Spot Screw, for upper looper drive lever shaft	
22 23		22569 39594			Screw, for oil collector plate	
24		22571			Oil collector Plate Magnetic Oil Drain Plug Screw	- 1
25		29477	_		Upper Looper Thread Tube Assembly	- 1
26		39568	G		Thread Tube	. 1
27		39568	J.		Thread Tube Tension Spring	- 1
28 29		22743			Set Screw, for thread tube tension spring	· 1
30		22760 39594			Screw, for oil filter screen and strainer	- 2
31		39594			Oil strainer, felt	· 1
32		22569	D		Screw, for chip guard	
33		G39578			Chip Guard	\cdot 1
34		22569		i,	Screw, for oil sight gauge	· 1
35 36		22894 A			Screw, for lower looper bar driving lever shaft	. 2
37		660-			Oil Sight Gauge	,] 1
38		39582			Air Duct, upper	. 1
39		8372	Α	,	Washer, for upper air duct	. 2
40		22569			Screw, for upper air duct	. 2
41 42		39582 22541			Base Plate	. 1
43		39595	D		Screw, for base plate	. 2
44		39582	BL.		Air Duct, outer	. 1
45		22569 1			Screw, for lower and outer air duct	_
46		39582			Air Duct lower	1
47		22586			Screw, for bottom cover	
48 49		22541 I 39582 I			Screw, for bottom cover	
50		39582		*	Bottom Cover GasketBottom Cover	
51		39593			Oil Gauge Indicator Assembly	
52		39582			Feed Bar Cover Assembly	1
53		39198 [Washer	. 1
54 55		22758 (Screw	
55		51295 E	D		Isolator	2

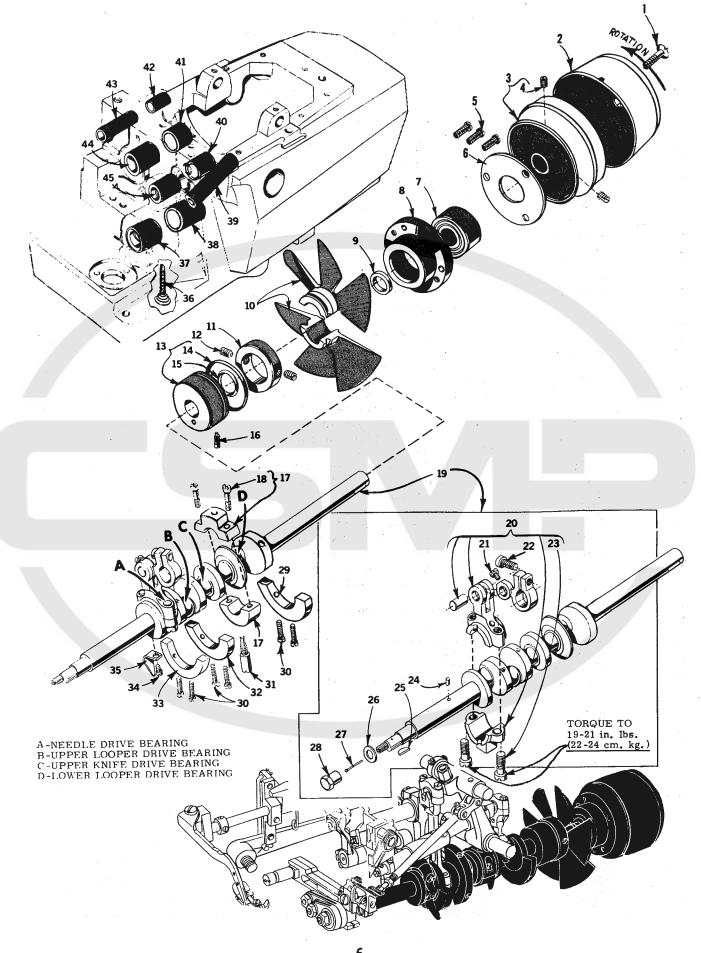

CRANKSHAFT MECHANISM AND BUSHINGS


Ref.	Part		Amt.
No.	No.	Description	Req.
1	22769 B	Screw, for pulley capPulley Cap	. 1
2	39521 D	Pulley Cap	1
3	39521 G	Pulley	
4	95	Screw, for pulley	
5	22569 Y	Screw, for crankshaft ball bearing retaining plate -	3
6 7	39590 H	Crankshaft Ball Bearing Retaining plate	· j
	660-835	Crankshaft Ball Bearing	·
8 9	39590 G	Crankshaft Ball Bearing Housing	1
10	39590 J	Thrust WasherCrank Chamber Cooling Fan	·
11	39591 L 39591 н	Crank Chamber Cooling Fan Calley	·
12	22894 D	Crank Chamber Cooling Fan Collar	j
13	39590 Y	Spot Screw, for crank chamber cooling fan collar	2
13	660-443	Crankshaft Bearing, inner right "O" Ring, for crankshaft bearing, inner right -	·
15	660-764	Oil Seal	·
16	22565 F	Screw, for crankshaft bearing, inner right	'
17	39590 D	Crankshaft Split Bearing	
18	97 A	Screw, for crankshaft split bearing	2
19	29477 JM	Crankshaft and Needle Driving Arm Crank Assembly	1
20	29477 MC	Needle Driving Arm Crank and Connecting Rod	'
	23 177 110	Assembly	. 1
21	22768 C	Screw, for needle driving arm connecting	•
		rod pin	. 1
22	22596 H	Screw, for needle driving arm crank	
23	22587 M	Screw, for needle driving arm connecting	
		rod	. 2
24	51-228 B1k.	rod Vent Plug	· į
25	39541 A	Feed Driving Eccentric Key	1
26	40-46	Washer	1
27	39593 U-126	Metering Pin, Marked "B"	. 1
28	39536 FN	Nut, for crankshaft	1
29	39591 B	Crankshaft Counterweight, right	1
30	22747 B	Screw, for crankshaft counterweights	. 6
31	39590 N	Stud, for crankshaft split bearing	
32	39591 A	Crankshaft Counterweight, middle	. 1
33	39591 K	Crankshaft Counterweight, left	. 1
34	87 U	Screw, for oil Splasher	. 1
35	39594 N	Oil Splasher	
36	666-94	Oil Wick and Spring	
37	39590	Crankshaft Bushing, left	.]
38 30	39590 T	Crankshaft Bushing, inner left	. 1
39 40	39544 X	Lower Looper Bar Bushing	·
40	39552 Z	Needle Driving Arm Crank Bushing, right	· [,
41	39573 AA 39555 N	Upper Knife Driving Arm Bushing, right	·
43	39555 P	Foot Lifter Shaft Bushing, right	
44	39573 K	Foot Lifter Shaft Bushing, left	
45	39552 AL	Upper Knife Driving Arm Crank Bushing, left Needle Driving Arm Crank Bushing, left	· 1
	JJJJL AL	needle britting Arm Grank Dushing, 1816	. 1

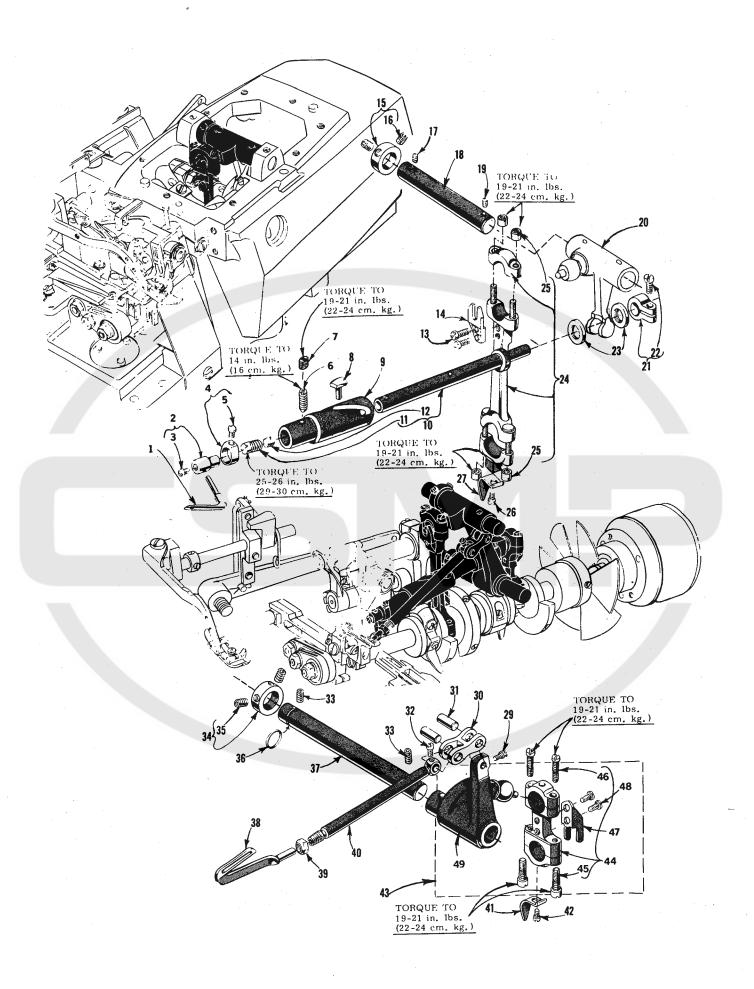

UPPER AND LOWER LOOPER DRIVING PARTS


Ref. No.	Part No.			Description	Amt. Req.
1	39508	Δ		Unner Looper marked "CC"	1
	39543	^		Upper Looper, marked "CC"	i
2 3 4	22564	G		Screw, for upper looper	i
4	39543			Upper Looper Holder Collar	1
5	77			Screw, for upper looper holder collar	1
6	22565	Н		Spot Screw, for bushing and cam guide	1
7	1025	L		Lock Screw, for bushing and cam guide screw	1
8*	39543	T		Cam Follower	1
9*	39543			Bushing and Cam Guide	1
10*	39543			Upper Looper Drive Shaft	1
11	22503			Screw, for cam follower locking clamp	1
12	39543	E		Cam Follower Locking Clamp	1
13	97	_		Screw, for ball joint guide fork	2
14	39544			Ball Joint Guide Fork, for upper looper drive lever	1
15	482			Upper Looper Shaft Collar	1
16	22894	C		Set Screw, for upper looper shaft collar	2
17	22565	V		Set Screw, for upper looper rock shaft	1
18	39543			Upper Looper Drive Lever ShaftSpot Screw, for upper looper drive lever shaft	1
19	22565	_		Upper Looper Drive Lever	, i
20 21	39543 39543			Clamp Collar, for upper looper drive shaft	i
22	22875			Screw, for clamp collar	i
23	39543			Upper Looper Drive Shaft Thrust Washer	ż
24	39543			Upper Looper Drive Lever Connecting Rod	ī
25	39543			Nut. barrel	4
26	87			Nut, barrel	i
27	39594			Oil Splasher	1
29	77			Screw, for lower looper bar connecting link pin	1
-30	39544	В		Lower Looper Bar Connecting Link	1
31	39544	D		Lower Looper Bar Connecting Link Pin	2
32	77			Screw, for lower looper bar connecting link pin	1
33	22894			Set Screw, for lower looper driving shaft	. 2
34	482		•.	Lower Looper Driving Shaft Collar	1
35	22894			Set Screw, for lower looper driving shaft collar	2
36		-206		"O" Ring, for lower looper driving shaft	١ .
37	39544			Lower Looper Driving Shaft	·
38	39508	Р		Lower Looper	' 1
39	39151			Lower Looper Bar	' 1
40	39544	M		Oil Splasher	1
41 42	39594 87			Screw, for oil splasher	. 1
43	29126			Lower Looper Bar Driving Lever and Connecting Rod	•
43	23120	וט		Assembly	. 1
44	39544	N		Lower Looper Drive Lever Connecting Rod	. i
45	22729			Screw, for connecting Rod	. 2
46	22729			Screw, for connecting rod	. 2
47	39544			Ball Joint Guide Fork	. 1
48	97			Screw, for ball joint guide fork	. 2
49	39544	U		Lower Looper Bar Driving Lever	. 1

^{*} The use of assembly No. 29126 EC is recommended instead of the individual parts.

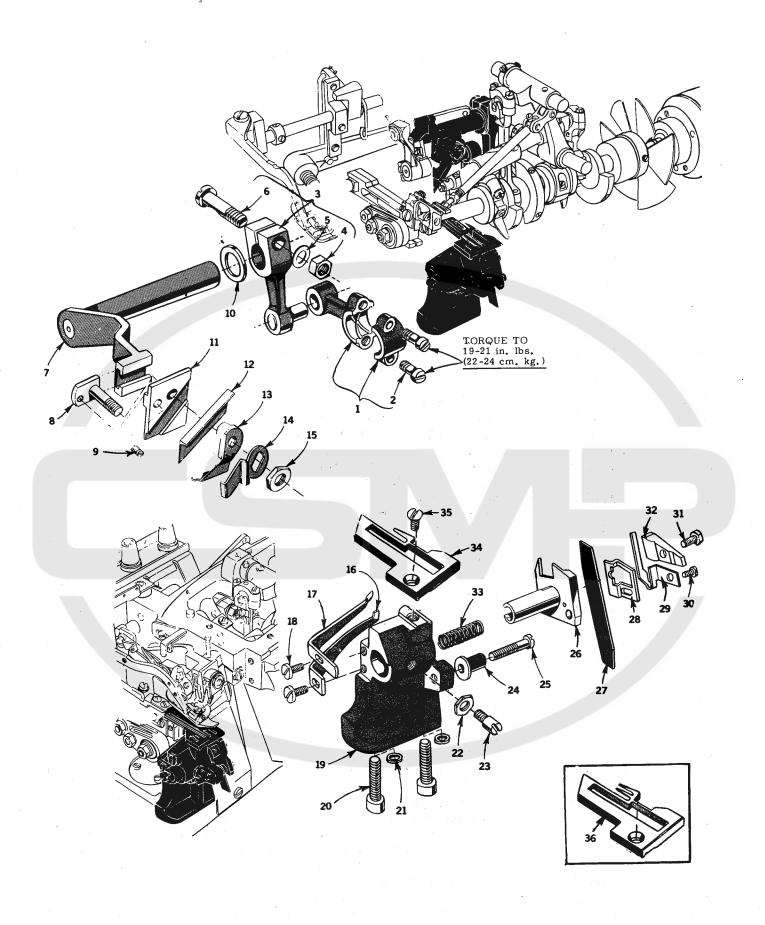


UPPER AND LOWER KNIFE

Ref.	Part No.		Description	Amt. Req.
1 2	39573 22587		Upper Knife Driving Connecting Rod	1 2
3	39573		Upper Knife Driving Lever	
4	55235	_	Nut, for upper knife driving lever	
5	6042		Washer, for upper knife driving lever	
6	55235		Locking Stud, for upper knife driving lever	
7	39573		Upper Knife Driving Arm	1
8	39571	D .	Upper Knife Clamp Stud	1
9	22738		Screw, for upper knife clamp stud	1
10	39573	A	Upper Knife Driving Arm Washer	1
11	39572		Upper Knife Holder Block	1
12	39570	-	Upper Knife	
13	39571		Upper Knife Clamp Upper Knife Chain Guard	1
14	39571	В	Nut, for upper knife clamp stud	1
15 16	14077 39525		Needle Guard, front	ាំ
17	39525	E	Needle Guard, rear	i
18	22585		Screw, for needle guards	2
19	39580		Throat Plate and Lower Knife Support Bracket	ī
20	22653		Screw, for throat plate and lower knife support	
20	22033	0-12	bracket	2
21	39580	F	Washer, for throat plate and lower knife support	_
	03000	•	bracket	2
22	14077	€-	Nut, for lower knife holder locking screw	
23	22892	В	Locking Screw, for lower knife holder	· i /
24	39550		Lower Knife Holder Locating Stud	
25	22729	В	Screw, for lower knife holder locking stud	1
26	39550	AK	Lower Knife Holder	. 1
27	39549		Lower Knife	_1
28	39550	AC	Knife Guide Plate	- 1
29	39550	AE	Lower Knife Clamp Spring	- 1
30	605	A	Screw, for lower knife clamp spring	- 1
31	22588	J	Screw, for lower knife clamp	. 1
32	39550		Lower Knife Clamp	.]
33	39550	E .	Lower Knife Holder Spring	. 1
34	C39524	BR	Throat Plate, Marked "LD", for Single Needle Machines	
35	22524		Screw, for throat plate	
36		BA-1/8	Throat Plate, Marked "EM", for Two Needle	•
	000021	, 	Machines	. 1

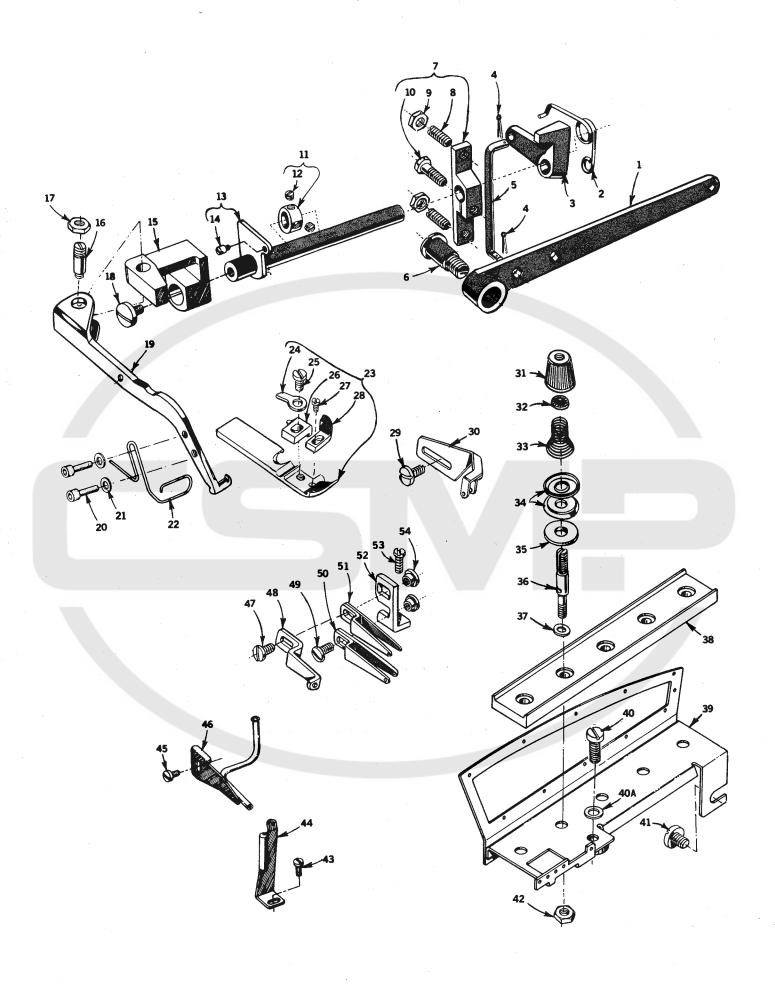


FOOT LIFTER, THREAD TENSION PARTS AND MISCELLANEOUS EYELETS

Ref.	Part		Amt.
No.	No.	Description	Req.
1	39855	Foot Lifter Lever	.]
2	39555 B	Foot Lifter Lever Spring Foot Lifter Intermediate Lever	·
3 4	39555 D 660-142	Cotter Pin, for foot lifter lever connecting link	. 2
5	39555 F	Foot Lifter Lever Connecting Link	•]
ő	22566 B	Screw. for foot lifter lever	. 1
7	39555 C	Foot lifter lever Arm	- 1
8	22597 E	Set Screw, for foot lifter lever arm	- 2
9	12538	Lock Nut, for foot lifter lever arm	· 2
10 11	627 12865	Screw, for foot lifter lever armFoot Lifter Lever Shaft Thrust Collar	. 1
12	88	Screw, for foot lifter lever shaft collar	- 2
13	39555 AE	Presser Arm Support Bracket Shaft	- 1
14	22845 B	SCROW	- 1
15	39555 AF	Presser Arm Support Bracket	- 1
16	22791 H	Screw Pin, for presser arm Nut, for presser arm screw	· - 1
17 18	258 A 88 D	Screw	.
19	39556 S	Presser Arm	- 1
20	99360	Screw	- 2
21	95956	Washer	- 2
22	99682 L	Finger Guard	- 1
23	39520 BA	Presser Foot	-
24 25	39530 G 22768 B	Screw, for stitch tongue and hinge spring	
26	39597 AB	Stitch Tongue Marked "FK"	- 1
27	22738	Screw for chip quard	- 1
28	39530 P	Chip Guard	- 1
29	22569 D	ScrewNeedle Thread Eyelet	-
30	39563 N 39592 Z	Needle Tension Nut, Yellow, Left	- - 1
31	39592 AA	Needle Tension Nut, Green, right	- i
	39592 AB	Upper Looper Tension Nut. Blue	- 1
	39592 AC	Lower Looper Tension Nut. Red	- 1
32	39592 AK	Tension Spring Ferrule	7
33	39592 AR-5	Needle Thread Tension Spring, left, 2 needle machines Needle Thread Tension Spring, right, 2 needle machines	Z 1
	39592 AR-4 39592 AR-1	Looper Thread Tension Spring, 2 needle machines	- 2
	39592 AR-2	Needle Thread Tension Spring, single needle machines	- Ī
	39592 AR-4	Looper Thread Tension Spring, single needle machines	- 2
34	39592 AD	Thread Tension Disc	6 or 8
35	39592 AF	Tension Disc Felt	3 or 4
36 37	39592 AL 8372 A	Washer	3 or 4
37 38	39592 AN	Tension Post Bar	- 1
39	39592 AG-5	Tension Post Mounting Bracket	- 1
40	22806 A	Screw, for tension mounting bracket	- 1
40 A	40-46	Washer	-]
41	22847 B	Screw, for tension post mounting bracket	- 1
42 43	39592 AH 22541 B	SCROM TOTAL]
44	39582 EW	Feed Bar Cover Latch	- 1
45	88 A	Screw	- 1
46	39568 AK	Thread Tube Bracket Assembly	-]
47	376 A	Screw, for upper looper thread eyelet	- - _ 1
48	39568 E	Auxiliary Lower Looper Thread Eyelet	- 1 _ 1
49 50	376 A 39568 B	Lower Looper Thread Eyelet	- i
50 51	39568 L	Upper Looper Thread Eyelet	- 1
52	39568 AD	Looper Thread Evelet Mounting Bracket	- 1
53	22569 B	Screw. for looper thread eyelet mounting bracket	- 1
54	43139 A	Nut, for looper thread eyelet screw	- 2

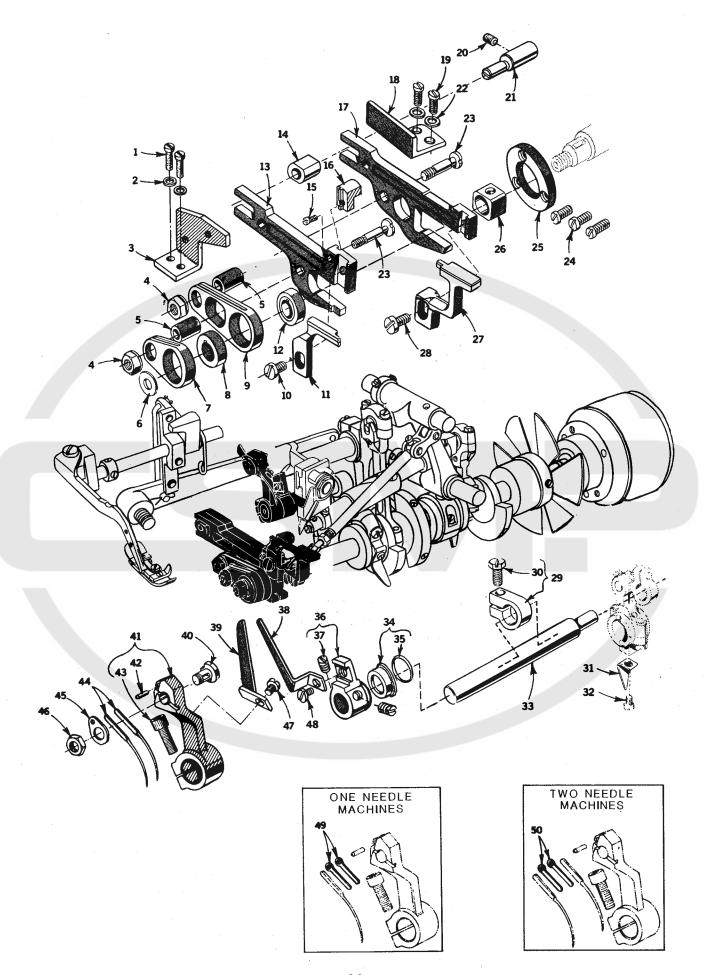

NEEDLE DRIVE AND FEED MECHANISM


Ref.	Part	Description	Amt. Req.
No.	No.		
1	22541 B	Screw, for main feed bar guide, left	2
2	8372 A	Usehow for main tood har dulde screw	~
3	39535 T		
4	39536 E	Nut, for feed bar driving stud	2
	39536 C	Caal Daw Dwiving Stud Kushing warestarter and a second	_
5 6	40-46	1146BAB TAN CHATT	•
7	39536 AF	Main Feed Bar Driving Connection	. i
8	39540 B-12	Differential Feed Bar Driving Connection	. j
9	39536 AE	Differential reed bar briving connection	. 1
10	93 A	Screw, for main feed dog	- 1
11	39505 AB	Dissimple of Ecology Priving Forenthic February	- 1
12	39540 B-14		
13	39534 AC 39535 J		- 1
14 15	22797 A	Compar for knife drive hlock	- 1
16	39573 DA	V. 3. 4. 0 0 1 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	- 1
17	39534 G	Differential Food Rar	- 1
18	39535 U	Differential Feed Bar Guide, right	- 1
19	22569 B	Comput for differential teed par divide. Fluit	
20	22894 R	Screw, for feed adjusting pin	-] -]
21	39535 AB	Screw, for feed adjusting pin Feed Ajusting Pin, marked "C"	- 1 - 2
22·	53634 C	Usehow fow differential teed bar dulde screw	
23	39535 B	Feed Bar Driving StudScrew, for thrust washer	- 3
24	22569 G	Differential Feed Bar Thrust Washer	- ĭ
25	39534 AF		- 1
26	39538	Differential Food Dog	-
27	39526 AB	C Fam diffonontial tood dod	-
28	22528 39543 Y	Moodle Drive Shatt Inrust Colldr	
29 30	22782 A	Conow for needle drive shatt thrust collai	
31	39594 N		444
32	87 U	o C., .il .mloobou	_
33	39522 AN		
34	39552 AG	Oil Cool for moodle driving shatt	-
35	660-207		
36	39568 AL	Looper Thread Pull-off Lever	. 2
37	88 B	Screw, for looper thread pull-off lever Looper Thread Pull-off	
38	39568 AH	Needle Thread Cam Pull-off	1
39	39563 P	Needle Clamp Stud	1
40	39551 S 39552 AW	Needle Driving Arm marked "Y"	
41 42	39552 AW 39552 AD	Stop Pin, for needle	1
42 43	22596 E	Conour for needle driving arm	
43 44	154 GFS	Naadla faa tua maadla machings	2
77	154 GHS	Moodle for single needle Machines	
45	39551 R	1 11 - 01	
46	14077 A	N L C.,	1
47	87 U	Campu for moddle thread Cam DILLI-DIT	1
48	22513	Screw for looper thread Dull-Ull	
49	39551 L	Needle Spacer, (.022 inch)(.556 mm) Thick for one needle machines	1
50	20551 0	Needle Spacer, (.012 inch)(.305 mm) Thick, for	
50	39551 P	two needle machines	1

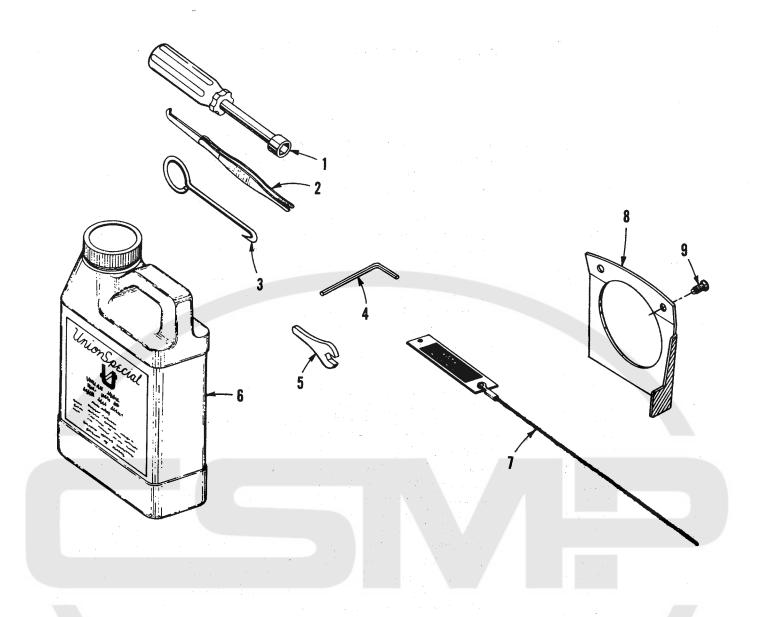

ACCESSORIES

Ref. No.	Part No.	<u>Description</u>	Amt. Req.
1 2 3 4 5 6 7 8	21388-AU 118 21227 BF WR65 116 28604 R 39899 A 21375 BB 80	Socket Wrench, Size 3/8" Tweezers	1 1 1 1 1 1 2
(not she		Plastic Machine Cover Threading Diagram	_

OIL METERING PIN

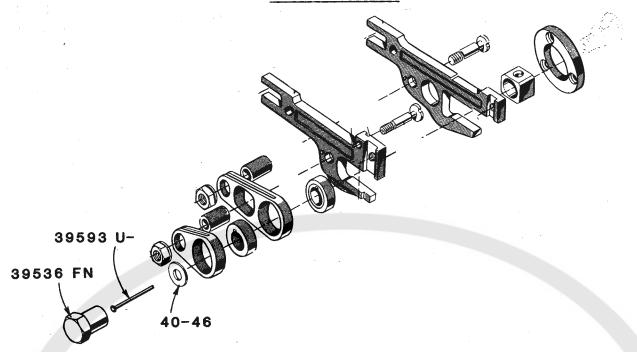

Beginning with machine serial number 1620485 the wood oil metering plug is now being replaced by a steel metering pin which is inserted inside the main shaft on all Class 39500 Machines.

The pin is easy to remove. On the "Mark IV" machines the head is protruding beyond the end of the shaft and it can be pulled out with a tweezers. With the wood plug the rate of oil flow was determined by the grain of the wood itself and could not be varied or adjusted. The steel pin, on the other hand, can be easily replaced with a slightly larger or smaller diameter pin to reduce or increase the flow to a precise degree.

NOTE: One final point - metering pins can <u>not</u> be added to machines with serial numbers <u>below</u> 1620485, because the crankshafts are not prepared for them. A new crankshaft assembly would have to be installed with the pre-selected metering pin in it.

39593 ป	METERING PIN SIZE	
	PIN	DIAMETER
PART NUMBE	R INCH	mm
39593 U-12	0.1250	3.175
39593 U-12		3.200
39593 U-12	0.1265	3.213
39593 U-12	7 0.1270	3,225
39593 U-12	75 0.1275	3.238
39593 U-12		3.251
39593 U-12	85 0.1285	3.263
39593 U-12	9 0.1290	3.276

MACHINE INVENTORY INFORMATION

Unit Number	Maker's Name	Machine Style	Serial Number	Needle Type	Date Of Purchase
·					
		1			
		· · · · · · · · · · · · · · · · · · ·			

				w 130	
				10.00	
				· ·	

			:		

DITIONAL	NFORMATION				
					,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,
		-			

Notes:			·		
			 		
	:				

				7	
				· · · · · · · · · · · · · · · · · · ·	
					0 T
				7	
	·				
			-		
					
					
** · · · · · · · · · · · · · · · · · ·					
	,	· · · · · · · · · · · · · · · · · · ·			



